

4

3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
FT	0					
B		REVISED PER ECO-07-014969	6/25/07	SS	SRY	

MATERIAL:
 HOUSING: THERMOPLASTIC PA, UL94V-0, BLACK.
 TERMINALS: BRIGHT TIN PLATED, COPPER ALLOY.
 SCREWS: 6-32, STEEL, ZINC PLATED, CLEAR CHROMATE.

ELECTRICAL:
 UL CLASS C: 20A, 150V.
 UL CLASS D: 10A, 300V.
 CSA TYPE B: 20A, 300V.
 CSA TYPE C: 20A, 300V.
 CSA TYPE D: 10A, 300V.
 CSA TYPE E: 20A, 300V.
 WIRE RANGE: 12-22 AWG

MECHANICAL:
 OPERATING TEMP.: -40°C TO +105°C
 RECOMMENDED TIGHTENING TORQUE: 7 IN-LBS.

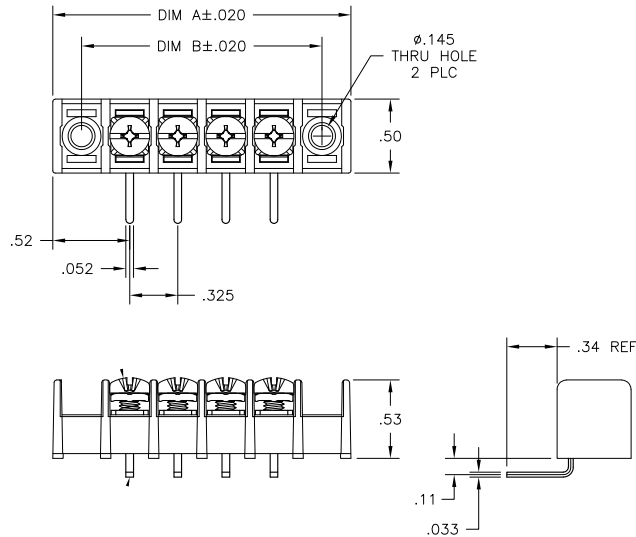

9.425	9.815	28	4DB-R208-28	2-1546463-8
9.100	9.490	27	4DB-R208-27	2-1546463-7
8.775	9.165	26	4DB-R208-26	2-1546463-6
8.450	8.840	25	4DB-R208-25	2-1546463-5
8.125	8.515	24	4DB-R208-24	2-1546463-4
7.800	8.190	23	4DB-R208-23	2-1546463-3
7.475	7.865	22	4DB-R208-22	2-1546463-2
7.150	7.540	21	4DB-R208-21	2-1546463-1
6.825	7.215	20	4DB-R208-20	2-1546463-0
6.500	6.890	19	4DB-R208-19	1-1546463-9
6.175	6.565	18	4DB-R208-18	1-1546463-8
5.850	6.240	17	4DB-R208-17	1-1546463-7
5.525	5.915	16	4DB-R208-16	1-1546463-6
5.200	5.590	15	4DB-R208-15	1-1546463-5
4.875	5.265	14	4DB-R208-14	1-1546463-4
4.550	4.940	13	4DB-R208-13	1-1546463-3
4.225	4.615	12	4DB-R208-12	1-1546463-2
3.900	4.290	11	4DB-R208-11	1-1546463-1
3.575	3.965	10	4DB-R208-10	1-1546463-0
3.250	3.640	9	4DB-R208-09	1546463-9
2.925	3.315	8	4DB-R208-08	1546463-8
2.600	2.990	7	4DB-R208-07	1546463-7
2.275	2.665	6	4DB-R208-06	8-1437667-1
1.950	2.340	5	4DB-R208-05	1546463-5
1.625	2.015	4	4DB-R208-04	1546463-4
1.300	1.690	3	4DB-R208-03	1546463-3
.975	1.365	2	4DB-R208-02	1546463-2

DIM B	DIM A	NO OF POS	CATALOG NUMBER	TYCO PART NO.
-------	-------	-----------	----------------	---------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 9/19/06	Tyco Electronics Corporation Harrisburg, PA 17105-3608												
DIMENSIONS: INCHES		CHK S YODER 9/19/06	NAME 4DB SERIES R208 STYLE												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S YODER 9/19/06	PRODUCT SPEC												
<table border="1"> <tr><td>0 PLC</td><td>± .</td></tr> <tr><td>1 PLC</td><td>± .</td></tr> <tr><td>2 PLC</td><td>± .01</td></tr> <tr><td>3 PLC</td><td>± .005</td></tr> <tr><td>4 PLC</td><td>± .</td></tr> <tr><td>ANGLES</td><td>± 2°</td></tr> </table>		0 PLC	± .	1 PLC	± .	2 PLC	± .01	3 PLC	± .005	4 PLC	± .	ANGLES	± 2°	APPLICATION SPEC	
0 PLC	± .														
1 PLC	± .														
2 PLC	± .01														
3 PLC	± .005														
4 PLC	± .														
ANGLES	± 2°														
MATERIAL	FINISH	WEIGHT	SIZE A3	CAGE CODE -											
-	-	-	DRAWING NO C-8-1437667-1	RESTRICTED TO -											
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 1											
			REV B												

AMP 1470-19 REV 31MAR2000