

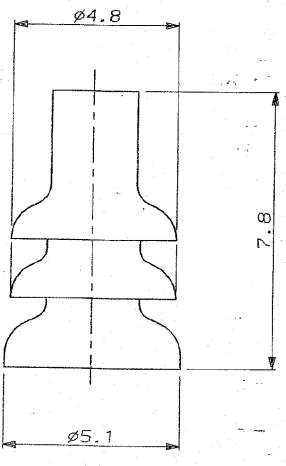


C.A.D. FILE CODE
S. C348989.A

DO NOT SCALE DIMENSIONS IN MM.

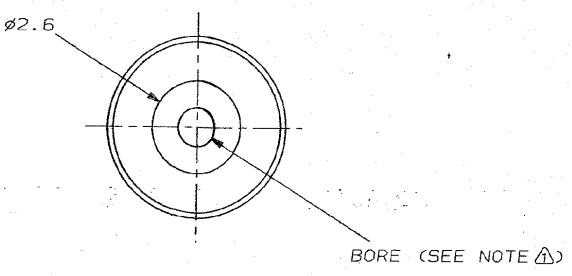

AMP

NOTES:

\triangle THIS SEAL IS SUITABLE FOR WIRE RANGE 0.5 TO 1.5 mm² AND INSULATION DIAMETERS OF 1.5 TO 2.4 mm. IT IS ALSO SUITABLE FOR 2 mm² WIRE, WHERE THE INSULATION DIAMETER IS 2.4 mm MAX.

| | | | | | |
|--------------------|--|---|-----|---|----------|
| RED | | SELF-LUBRICATING SILICONE RUBBER | | 348989-1 | |
| COLOUR | | MATERIAL | | PART NUMBER | |
| CUSTOMER DWG | | COPYRIGHT 1995 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING. | | RELEASED FOR PUBLICATION 05 APR 1995 | |
| FOR REFERENCE ONLY | | TOLERANCES UNLESS OTHERWISE STATED DEC ± 0.5 ANGLES ± 1° | | DR. P.J.S. 5.4.95 CH. G.L. APP. M.W. | |
| | | NAME | | TERMINAL HOUSE STANMORE MIDDX. | |
| A RELEASED | | .070 SERIES CABLE SEAL | | | |
| 1 PRELIM. ISSUE | | ECONOSEAL 3 LOW CURRENT | | | |
| REV. MODIFICATION | | SCALE | LOC | SIZE | DWG. No. |
| CHANGE No. DATE | | 10/1 | E | A3 | C348989 |
| | | | | REV | SHEET |
| | | | | A | 1 / 1 |