

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LTR	DESCRIPTION	DATE	BY	APPD
B		REV ECO-08-004864	29FEB08	LH	BM

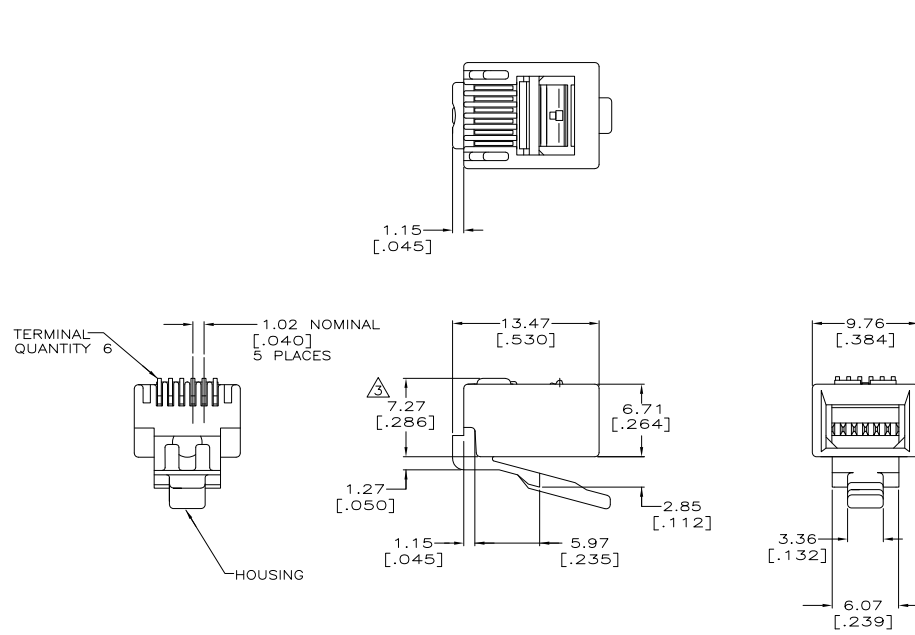

- ⚠ MATERIAL: HOUSING—POLYCARBONATE,CLEAR. TERMINAL—0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27μm[.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54μm[.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 2. PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.99[.039] AND A MAXIMUM DIAMETER ROUND CABLE JACKET OF 4.57 [.180].
- ⚠ TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- ⚠ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ⚠ 1000 ASSEMBLIES PER PACKAGE.
- ⚠ 100 ASSEMBLIES PER PACKAGE.

⚠	5-569032-3
⚠	5-569032-2
⚠	PACKAGED PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG L. HALL 29FEB2008 CHK S. MCNEILL 29FEB2008 APPD B. MCNEILL 29FEB2008	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: MM (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P.L.C. ± .010 1 P.L.C. ± .015 2 P.L.C. ± .020 3 P.L.C. ± .030 4 P.L.C. ± .040 ANGLES ± .5° FINISH -	NAME B. MCNEILL PRODUCT SPEC 108-1163 APPLICATION SPEC 114-6016 HEIGHT -	SIZE CAGE CODE DRAWING NO A2 00779 C-569032 RESTRICTED TO -
MATERIAL -	FINISH -	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 of 1 REV B

AMP 1471-9 REV 31MM2000

569032