

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LR	DESCRIPTION	DATE	BY	APP
AA	00				
	C2	REVISED PER ECO-11-005033	26MAR11	RK	HMR

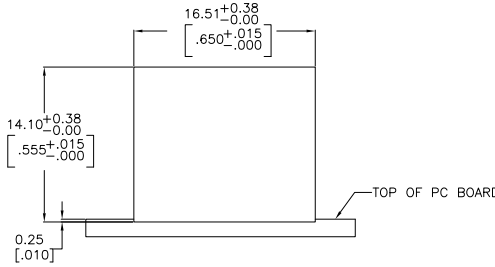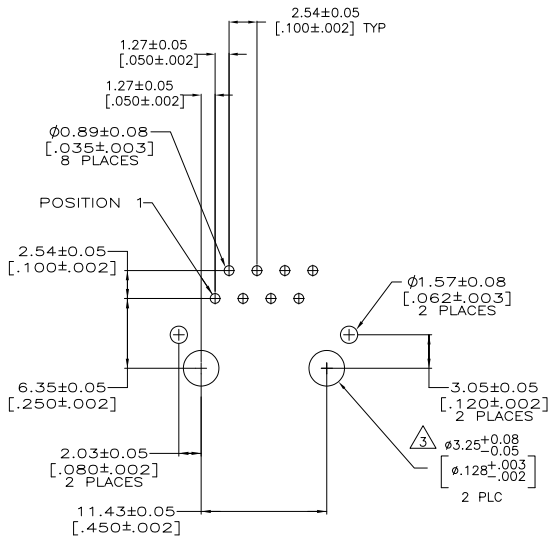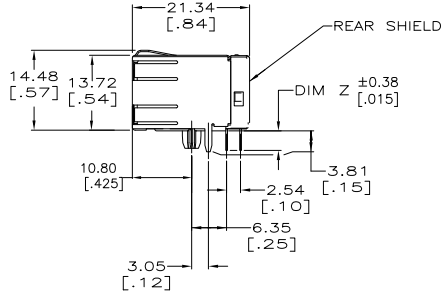

- MATERIAL: HOUSING - NYLON, COLOR: BLACK, UL 94V-0. OVERMOLDED TERMINAL ARRAY - PBT, COLOR: BROWN. TERMINALS - 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27 µm [.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81 µm [.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27 µm [.000050] MINIMUM THICK NICKEL UNDERPLATE. SHIELDS - 0.25 [.010] THICK COPPER ALLOY PLATED WITH 1.27 µm [.000050] MINIMUM NICKEL AND 2.03 µm [.000080] MINIMUM HOT TIN DIP ON PCB GROUND TABS.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.
- DIELECTRIC WITHSTANDING VOLTAGE BETWEEN SHIELD AND TERMINAL IS 1500 VAC

3.05 [.120]	1-5406299-1
3.56 [.140]	5406299-1
DIM. Z	PART NUMBER

RECOMMENDED PC BOARD LAYOUT COMPONENT SIDE SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	204PR2005
		CHK	T. SPRINKLE / A. MAYER
		APPD	J. WESTMAN
		DESIGNER	S. ELCKINGER
		PRODUCT SPEC	108-1163-2
		APPLICATION SPEC	114-2048
		WEIGHT	-
MATERIAL		SEE NOTE 1	SEE NOTE 1
FINISH		SEE NOTE 1	SEE NOTE 1
CUSTOMER DRAWING		SIZE	A2
		FACE CODE (DRAWING ID)	00779
		SCALE	2:1
		SHEET	1 of 1
		REV	C2

1471-9 (3/11)

5406299

A