



- △ MATERIAL: HOUSING - HIGH TEMPERATURE NYLON, BLACK, IR COMPATIBLE, UL 94V-0. TERMINALS - 0.33 [0.13] THICK PHOS BRONZE PLATED WITH 1.27µm [0.00050] THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm [0.00150] THICK MATTE TIN IN SOLDER AREA OVER 1.27 µm [0.00050] THICK NICKEL UNDERPLATE. SHIELD - 0.254 [0.010] THICK COPPER ALLOY PLATED WITH 1.27µm [0.00050] MINIMUM NICKEL AND 2.03µm [0.00080] MINIMUM HOT TIN DIP ON PCB GROUND TABS.
- △ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 3. ALL DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- △ THIS HOLE REQUIRED FOR -2 ONLY.
- △ REAR GROUND TAB NOT REQUIRED FOR -1.

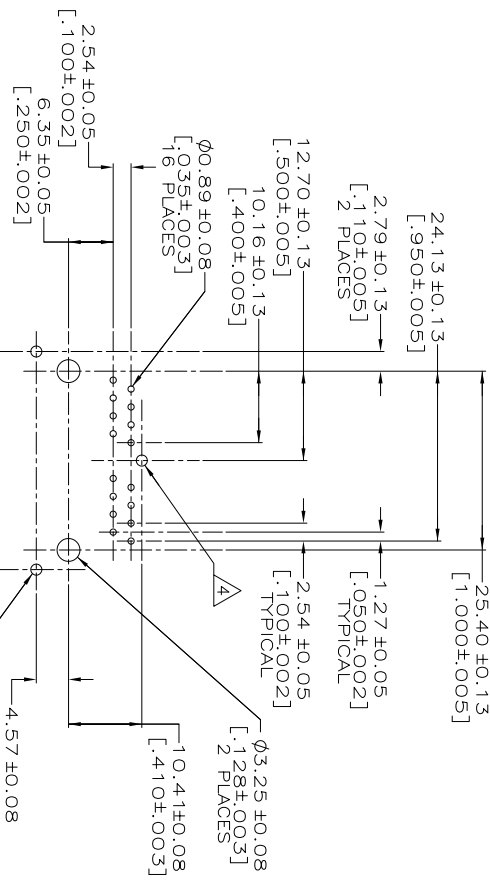

SUGGESTED PC BOARD LAYOUT
COMPONENT SIDE
SCALE 2:1

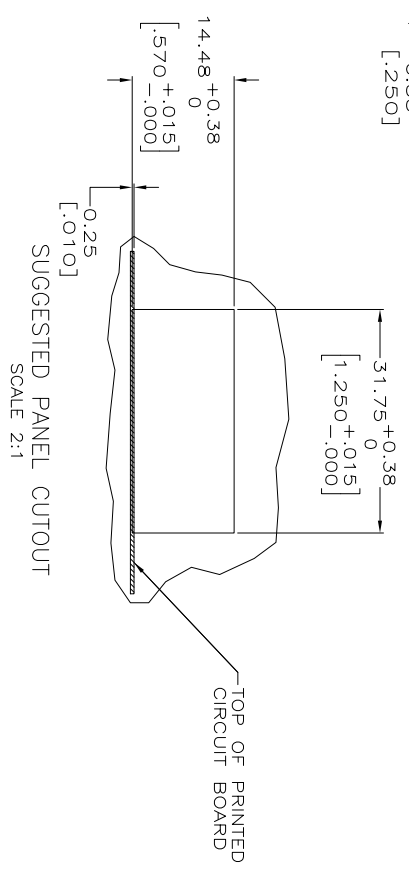

THIS DRAWING IS A CONTROLLED DOCUMENT.

UNLESS OTHERWISE SPECIFIED:	TERMINAL FINISH:	TERMINAL SOLDER:
DIMENSIONS: mechanical	0 Plc 2 Plc 4 Plc	4 4 4
	ANGLES	±

DESCRIPTION	REV	DATE	BY	CHKD	APP'D
WITH REAR PCB GROUND TAB	5406562-2				
WITHOUT REAR PCB GROUND TAB	5406562-1				

DESCRIPTION: MODULAR JACK ASSEMBLY, 2 PORT, 8 POSITION, RIGHT ANGLE, SHIELDED, CAT 4

DATE CODE: 108-1163
PART NO.: A2100779 @ 5406562

SCALE: 4:1