


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECO-11-005027	11MAR11	RK	HMR

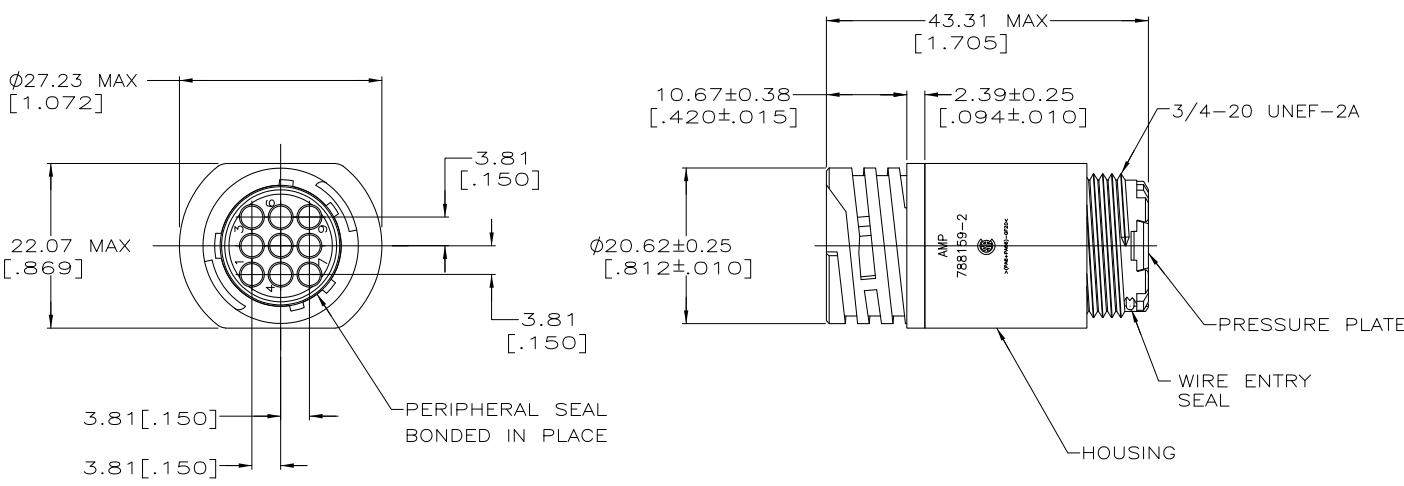

1. THIS PART WILL ACCEPT NINE (9) MULTIMATE PIN CONTACTS.
- ⚠ HOUSING AND PRESSURE PLATE: NYLON, BLACK.  
 PERIPHERAL SEAL: ELASTOMER, GRAY.  
 WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.

.065-.120	STANDARD	788159-2
.040-.080	SMALL	788159-1
DIAMETER RANGE	INSULATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	25 AUG 98	TE Connectivity RECEPTACLE ASSEMBLY, 13-9, STANDARD SEX, SERIES I, SEALED, CIRCULAR PLASTIC CONNECTOR	RESTRICTED TO
DIMENSIONS:		CHK	25 AUG 98		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	25 AUG 98		
mm(INCHES)		NAME			
0 PLC	± -	PRODUCT SPEC		SIZE	
1 PLC	± -	APPLICATION SPEC		CAGE CODE	
2 PLC	± -	WEIGHT		DRAWING NO	
3 PLC	± 0.13 [.005]			A3	00779
4 PLC	± -			C=	788159
ANGLES	± -				
MATERIAL	FINISH	CUSTOMER DRAWING		SCALE	2:1
				SHEET	1 of 1
				REV	A1