THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
BD	35

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

1. PLUG MATES WITH RECEPTACLE 208495.
2. THIS PLUG ACCEPTS THREE (3) TYPE XII FEMALE CONTACTS. MAXIMUM WIRE INSULATION DIAMETER = .220.
3. AMP PART NUMBER AND DATE CODE TO BE LOCATED ON COUPLING RING.

4 MAJOR KEYS IN METAL SHELL PLUG AND PLUG LOCATED 180° (OPPOSITE) FROM EACH OTHER.

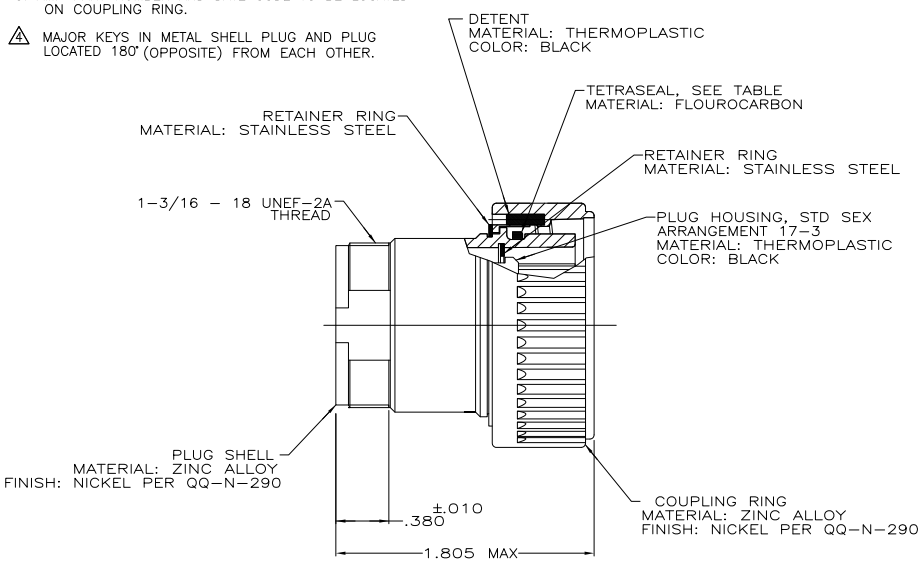

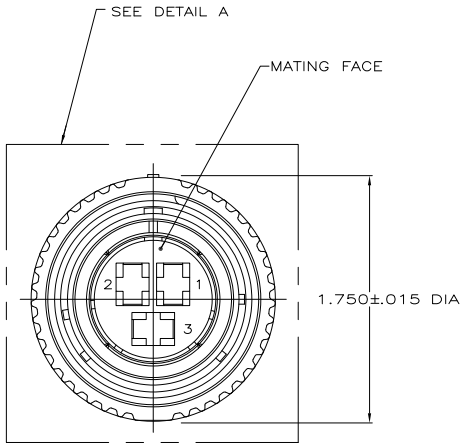



DETAIL A

OBSOLETE	DETAIL A	NO	208494-4
	AS SHOWN	YES	208494-3
	AS SHOWN	NO	208494-1
	KEYING	TETRASEAL	PART NUMBER

208494

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE CALLOUT
FINISH: SEE CALLOUT

DWN H MOLL 7-2-92
CHK R.STONE 12-29-92
APVD K.BEAVER 12-29-92
PRODUCT SPEC 108-10040
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME PLUG ASSEMBLY, STANDARD SEX, SERIES 3, 22-3, CMC

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-208494 | RESTRICTED TO –

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV M1

1471-9 (3/11)

Downloaded from Elcodis.com electronic components distributor