COPYRIGHT 2000
BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| LTR | DESCRIPTION | DATE | DWN | APVD |
| A1 | E60005760 | 16JUN2001 | NG | GF |
| A2 | DRAWING ADJUSTED | 06DEC2002 | NG | GF |

3 WAY
3 POLIG



4 WAY
4 POLIG



5 WAY
5 POLIG



7 WAY
7 POLIG



8 WAY
8 POLIG



MOUNTING HOLE DIMENSION
LOCHBILD FUER MONTAGE




PCB HOLES
PCB THICKNESS 1.6 mm MAX.
PCB LOCHBILD
PCB DICKE 1.6 mm MAX.

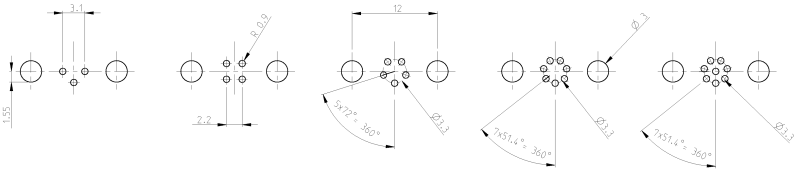


| | |
|---|---|
| MATERIAL / MATERIAL: PBT, UL-94 V2<br>SHELL MATERIAL / GEHAEUSEMATERIAL: CUZN<br>FINISH / BESCHICHTUNG: TRIBOR 4 µm | 1 |
| CODING / KODIERUNG | 6 |
| WIRE GAGE / DRAHTGROESSE IN $mm^2$: 0.25 | 5 |
| WIRE GAGE / DRAHTGROESSE IN $mm^2$: 0.14 | 4 |
| CONTACT RESISTANCE / KONTAKTWIDERSTAND: => 5 mΩ | 3 |
| RATED CURRENT PER CONTACT / NENNSTROM PRO KONTAKT: 3 A | 2 |
| RATED CURRENT PER CONTACT / NENNSTROM PRO KONTAKT: 1 A | 1 |
| SHELL PROTECTION CLASS / SCHUTZKLASSE:IP 65 / DIN 40050 | |
| TERMINATION: SOLDERING / VERBINDUNG: LOETKONTAKTE | |
| TEST VOLTAGE / PRUEFSPANNUNG: 500 VAC | |
| OPERATING VOLTAGE / BETRIEBSSPANNUNG: 60 VAC | |
| OPERATING TEMPERATURE: -40°C TO +80°C /<br>ARBEITSTEMPERATUR: -40°C BIS +80°C | |
| MATING CYCLES / STECKZYKLEN: 500 MAX. | |
| TECHNICAL DATA<br>TECHNISCHE DATEN | |

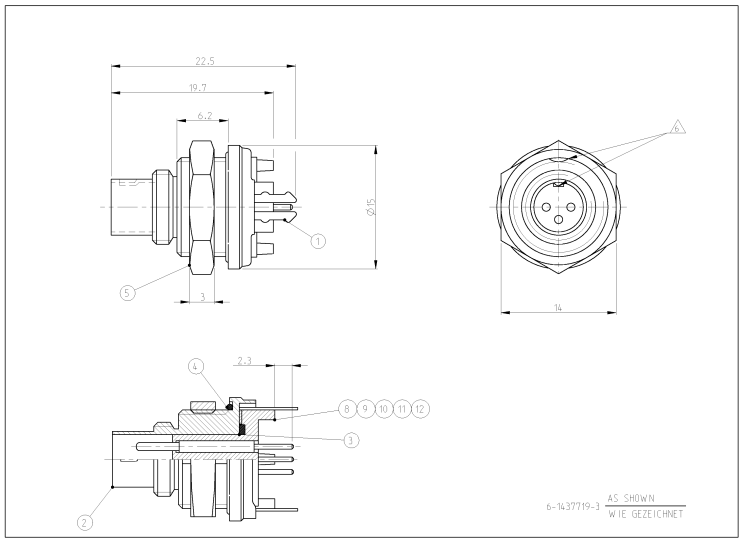


| TYCO-NO. / TYCO NR. | | | | | | |
|---|---|---|---|---|---|---|
| 0-1418049-1 | 0-1418048-1 | 6-1437719-5 | 6-1437719-4 | 6-1437719-3 | | |
| 1 | | | | | INSULATION TUBE 8 POS. / ISOLIERHUELSE 8 POL. | 12 |
| | 1 | | | | INSULATION TUBE 7 POS. / ISOLIERHUELSE 7 POL. | 11 |
| | | 1 | | | INSULATION TUBE 5 POS. / ISOLIERHUELSE 5 POL. | 10 |
| | | | 1 | | INSULATION TUBE 4 POS. / ISOLIERHUELSE 4 POL. | 9 |
| | | | | 1 | INSULATION TUBE 3 POS. / ISOLIERHUELSE 3 POL. | 8 |
| 8 | 7 | | | | MALE PIN APPLIED BY PRESSURE / STIFTKONTAKT EINGEPRESST | 7 |
| | | 5 | 4 | 3 | MALE PIN APPLIED BY PRESSURE / STIFTKONTAKT EINGEPRESST | 6 |
| 1 | 1 | 1 | 1 | 1 | NUT / MUTTER | 5 |
| 1 | 1 | 1 | 1 | 1 | SEAL / DICHTUNG | 4 |
| 1 | 1 | 1 | 1 | 1 | SEAL / DICHTUNG | 3 |
| 1 | 1 | 1 | 1 | 1 | HOUSING / GEHAEUSE | 2 |
| 1 | 1 | 1 | 1 | 1 | GROUND ON PCB SPRING / VERBINDUNGSFEDER ZUR PCB MASSE | 1 |
| - | - | - | - | - | REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REV.) | |
| QTY REQD PER ASSY | | | | | | |
| T01-0570-P08 | T01-0570-P07 | T01-0570-P05 | T01-0570-P04 | T01-0570-P03 | DESCRIPTION / BESCHREIBUNG | ITEM-NO. TEIL-NR. |
| CATALOG-NO. | CATALOG-NO. | CATALOG-NO. | CATALOG-NO. | CATALOG-NO. | PARTS LIST / TEILE LISTE | |

| | | | |
|---|---|---|---|
| DRN: 18JUN2001 | tyco Electronics AMP GmbH | | |
| J.GEISTER 18JUN2001 | D - 64625 Bensheim | | |
| CHK: H.SCHEDER 18JUN2001 | | | |
| APVD: G.FELDMEIER | TITLE: T01 MALE PLUG CONN, PANEL MNT, PCB VER, 3-8 POS, 180 DEGR, T01 STIFTSTECKER,EINBAU, PCB VER, 3-8 POS, 180 GRAD | | |
| PRODUCT SPEC: - | | | |
| APPLICATION SPEC: - | SIZE: A1 | CAGE CODE: 00779 | DRAWING NO: 6-1437719-3 |
| WEIGHT: - | SCALE: NONE | SHEET: 1 OF 1 | REV: A2 |
| CUSTOMER DRAWING: - | | | |

Downloaded from Elcodis.com electronic components distributor