

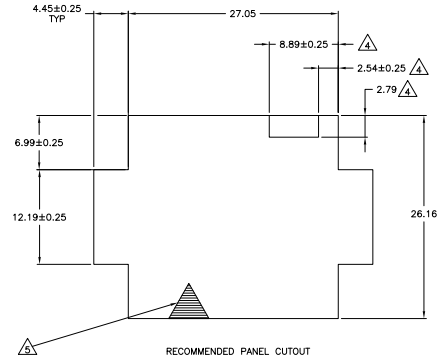






THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
00					
AL2		REVISED PER EDD-11-004587			



MM	IN	MM	IN
6.99	.275	27.43	1.080
4.45	.175	27.05	1.065
2.79	.110	26.67	1.050
2.54	.100	26.16	1.030
2.29	.090	25.91	1.020
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.89	.350
0.13	.005	8.13	.320
MM	IN	MM	IN

- MATE WITH APPROPRIATE UNIVERSAL MATE-N-LOCK™ PLUG.
 - RECOMMENDED PANEL THICKNESS 0.75 - 2.29.
 - PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- △ OPTIONAL FOR KEYING HOUSING IN PANEL.
 - △ CIRCUIT NUMBER 1 LOCATION.
 - △ DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
 - △ FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIED ORIENTATION, OPTIONAL.
 - △ UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
 - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	BLACK	1-480709-9
△ OBSOLETE	GRAY	1-480709-8
△ OBSOLETE	BLUE	1-480709-6
△ OBSOLETE	GREEN	1-480709-5
△ OBSOLETE	YELLOW	1-480709-4
△ OBSOLETE	ORANGE	1-480709-3
△ SUPERSEDED BY 1-480709-0	RED	1-480709-2
	BROWN	1-480709-1
	NATURAL	1-480709-0
	COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED	DATE	BY	CHK	APP

TE Connectivity
 12 CIRCUIT, UNIVERSAL MATE-N-LOCK™
 CUSTOMER DRAWING
 DATE: 4.1
 SHEET: 1 OF 2
 AL2

METRIC

