



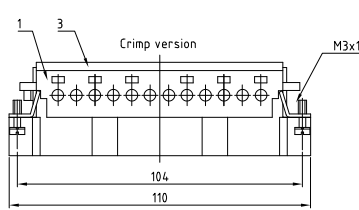
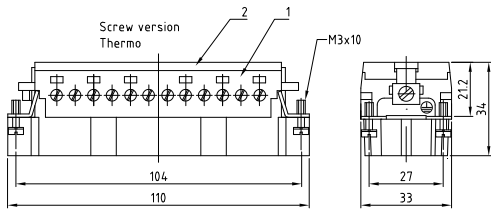







THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

REV	DATE	BY	APP'D	DESCRIPTION
E1	23.01.08	SR	ST	text for packaging corrected ECR-08-001868
E2	15FEB11	HMR	MM	REVISED PER ECO-11-002591

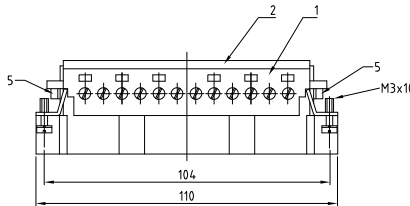

Contact arrangement view from termination side



- NOTES:
- SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3.2 MM
 - SUITABLE HOOD SIZE 8; 12-SERIES HB, HD, HP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264
 - Strip length: Screw connection 10mm
Spring clamp connection 10mm Crimp connection 7.5mm
 - STANDARDS:
DIN EN 61984; DIN EN 60664-1
- ⚠ PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED
- ⚠ SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES

NO.	DESCRIPTION	MATERIAL	COLOR / FINISH	QUANTITY	NOTES
2	cylinder screw	steel	blue	5	M4x6
1	cover spring clamp version		light grey	4	
1	cover crimp version		light grey	3	
1	cover screw version		light grey	2	
1	pin insert		light grey	1	

HE.24.S11S.B1.24.PES	HE.24.S11S.B1.24.MPE	HE.24.S11S.C1.B1.24	HE.24.S11S.S1.11.4+6	HE.24.S11S.A0.B1.24	HE.24.S11S.C0.B1.24	HE.24.S11S.B1.24	HE.24.S11S.B1.24	HE.24.S11S.B1.24	HE.24.S11S.B1.24	HE.24.S11S.B1.24	HE.24.S11S.B1.24
----------------------	----------------------	---------------------	----------------------	---------------------	---------------------	------------------	------------------	------------------	------------------	------------------	------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DM Schneider 08.02.2000	Tyco Electronics Corporation
DIMENSIONS: mm		OK Schneider 08.02.2000	Harrisburg, Pa 17105-3608
MATERIAL: FINISH:		APPROVED: NAME:	Male insert
PRODUCT SPEC:		APPLICATION SPEC:	HE.24.ST1.S/C
WEIGHT:		SIZE CASE CODE DRAWING NO:	A2 00779 C=1103640
CUSTOMER DRAWING		RESTRICTED TO:	