

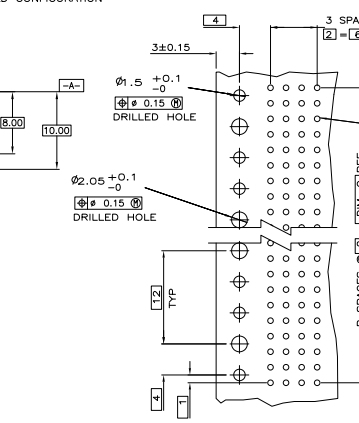
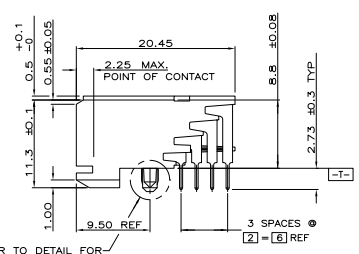

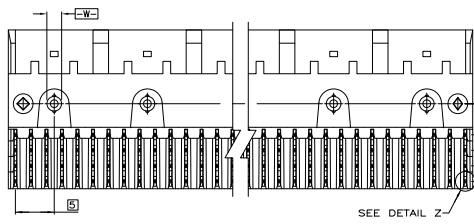
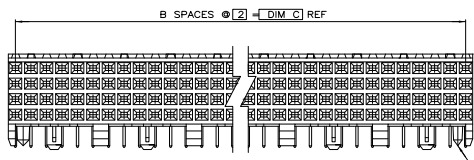
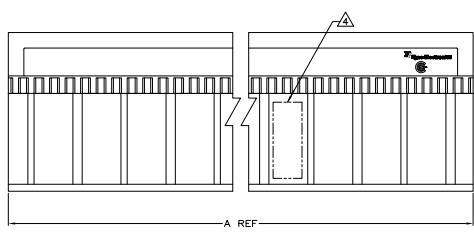


REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00				
AAA		REVISED PER EDD-11-005033			26MAR11 RJK HMR



RECOMMENDED CIRCUIT PATTERN
 PER IPC-0350 TYPE II, CLASS C
 (COMPONENT SIDE)

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
 COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR-BRONZE.
- △ CONTACT FINISH:
 UNDERPLATE (ENTIRE CONTACT) -
 0.00127 MIN. NICKEL
 ON MATING SURFACES -
 CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
 UNCONTROLLED ENVIRONMENT
 ON LEADS -
 0.00381 MIN. TIN-LEAD, OVER UNDERPLATE
 LUBRICATION (ENTIRE CONTACT)
 SURFACE CONDITIONER PER AMP SPEC. 112-1002 AFTER PLATING.
- △ PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED
 APPROXIMATELY AS SHOWN.
- △ OBSOLETE PARTS: OBSOLETE GS STREAMLINING PER D.RENAUD/D.SINIS



	NO	34	17	35.88		72	1-536507-1
	NO	130	65	131.88		264	1-536507-0
	NO	106	53	107.88		216	536507-9
OBSOLETE	NO	118	59	119.88		240	536507-8
	NO	70	35	71.88		144	536507-7
	NO	58	29	59.88		120	536507-6
OBSOLETE	NO	82	41	83.88		168	536507-5
	NO	94	47	95.88		192	536507-4
	NO	46	23	47.88		96	536507-3
	NO	22	11	23.88		48	536507-2
	YES	10	5	11.88		24	536507-1

POSITIONING PEGS	C	B	A	FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. IN CHARGE / BY DATE

TE Connectivity
 RECEPTACLE ASSEMBLY, SIGNAL MODULE,
 2-PACK 2mm PBL,
 4 ROW, 2.75mm LEAD LENGTH

SIZE DATE SIZE DRAWING ID
 A1 00779 G=536507

CUSTOMER DRAWING