

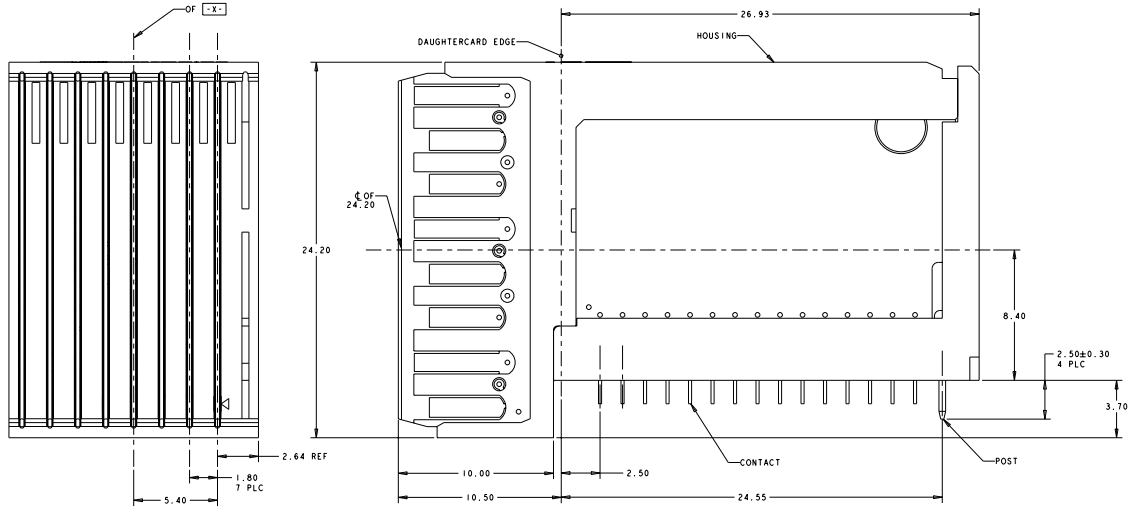


REV	DATE	DESCRIPTION	BY	CHK	APP
A	EC 0512-0341-04		PLM/DMH	DM	GG
A1	REVISED PER ECO-09-025659		PLM/DMH	DM	HR

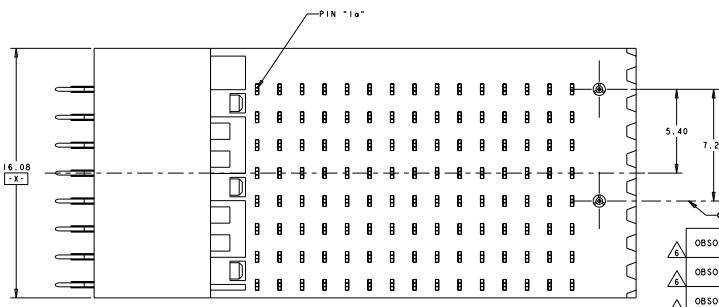

- △ HOUSING: LCP, UL94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE.
- △ CONTACT: 0.76 μm GOLD PER ASTM B 488 IN CONTACT AREA.
1.27 μm MIN TIN-LEAD
ON PCB TAIL.
OVER 1.27 μm MIN NICKEL PER
SAE AMS-00-N-290 OVER ALL.
POST: 1.27 μm MIN NICKEL.
- △ MANUFACTURING TOLERANCE
FOR A Ø 0.56±0.05 FINISHED HOLE.
DRILLED HOLE: Ø 0.65±0.02
COPPER PLATE: 0.050±0.025
TIN/LEAD PLATE: 0.0124±0.0038
- △ CONTACT: 0.76 μm GOLD PER ASTM B 488 IN CONTACT AREA.
1.27 μm MIN MATTE TIN PER ASTM B 545
ON PCB TAIL.
OVER 1.27 μm MIN NICKEL PER
SAE AMS-00-N-290 OVER ALL.
POST: 1.27 μm MIN NICKEL.
- △ MANUFACTURING TOLERANCE FOR A
Ø 0.575 ±0.045 FINISHED HOLE WITHOUT
TIN LEAD PLATING.
DRILLED HOLE: Ø 0.65 ±0.02
COPPER PLATING: 0.025 ± 0.050
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

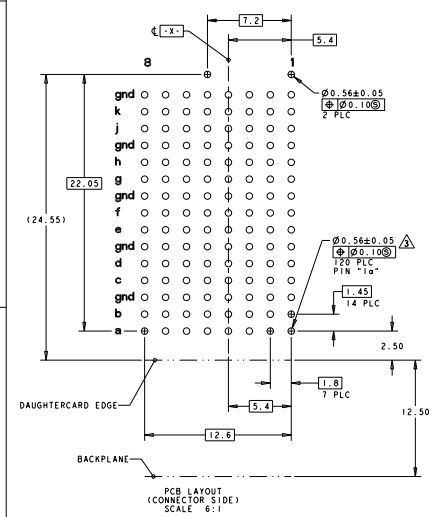

REV	DATE	DESCRIPTION	PART NUMBER
△	△	△	1410232-6
△	△	△	1410232-5
△	△	△	1410232-4
△	△	△	1410232-3
△	△	△	1410232-2
△	△	△	1410232-1

REV	DATE	DESCRIPTION	PART NUMBER
△	△	△	1410232-6
△	△	△	1410232-5
△	△	△	1410232-4
△	△	△	1410232-3
△	△	△	1410232-2
△	△	△	1410232-1

RIGHT ANGLE, PLUG ASSEMBLY,
 LEFT END MALL: 25.4mm Mu11161/g
 RT 1, DAUGHTERCARD CONNECTOR

DATE: 05/12/04
 DRAWN BY: PLM/DMH
 CHECKED BY: DM/HR
 APPROVED BY: GG/HR

SCALE: 6:1

CUSTOMER DRAWING