

4



3

2





1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION OCT. 2004.
 © COPYRIGHT 2004 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
A		RELEASED		08OCT04	T.K	K.I.	

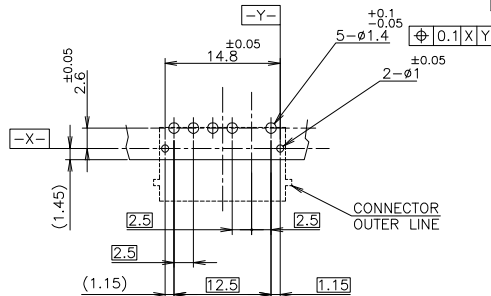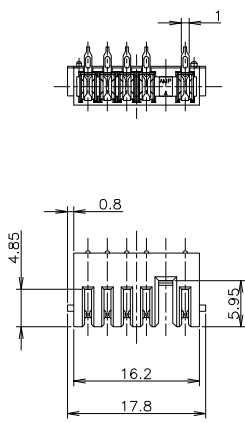

基板取付推奨寸法
 RECOMMENDED P.C. BOARD LAYOUT
 P.C. BOARD THK 0.8~1.2
 (VIEW FROM CONNECTOR MOUNTING SIDE)



GENERAL TOLERANCE
 一般公差

10 ≥	±0.2
30 ≥ > 10	±0.25
100 ≥ > 30	±0.3
ANGLES: ±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 概 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN T.KATANO	08OCT04		Tyco Electronics AMP K.K. Kawasaki, Japan		
0 PLC ± -	1 PLC ± -	CHK T.KIMURA	08OCT04				
2 PLC ± -	3 PLC ± -	APVD K.IKEGAMI	08OCT04	NAME 名称	RECEPTACLE ASSEMBLY 2.5mm PITCH 2ND BATTERY CONNECTOR		
4 PLC ± -	ANGLES ± -	PRODUCT SPEC 製品規格	108-5652	SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
MATERIAL 材料	FINISH 仕上	APPLICATION SPEC 取付適用規格	WEIGHT	A3	00779	6318430	-
CUSTOMER DRAWING				SCALE 尺度	2:1	SHEET 1 of 1	REV A

- 1 材料 ハウジング: 熱可塑性樹脂 UL94V-0
色; 黒
コンタクト: 銅合金
- 2 仕上げ コンタクト: Ni 下地めっき
接触部 Pb-Ni めっき
接触部 Au フラッシュめっき
半田付け部 すずめっき
- 1 MATERIAL HOUSING: THERMOPLASTIC RESIN, UL94V-0
COLOR; BLACK
CONTACT: COPPER ALLOY
- 2 FINISH CONTACT: Ni ALL OVER UNDER PL
Pd-Ni PL. AT CONTACT AREA
Au FLASH PL. AT CONTACT AREA
TIN PL. AT LEAD AREA

6318430-1 :AS SHOW