
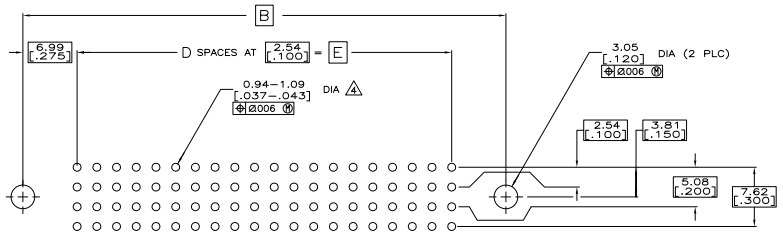

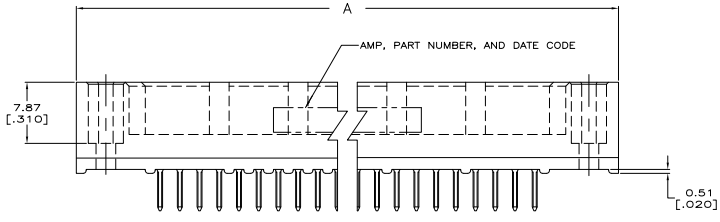


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK
AD	00			
R1		REVISED PER ECO-11-004917	11MMR11	RK HMR

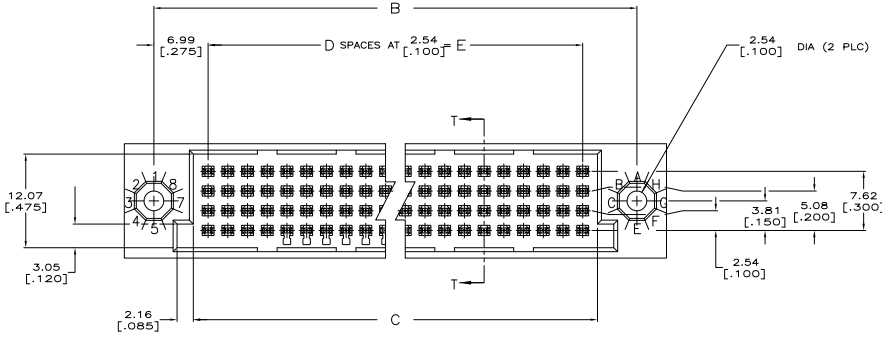

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY	DATE	TE Connectivity
DRAWN BY		APPROVED BY		
CHECKED BY		PROJECT NAME	HDI, 4 ROW, PIN ASSEMBLY, 4.83 [190] LONG SOLDER PINS, 00076 [000030] GOLD PLATE	
MATERIAL		OPERATION SPEC	SIZE	DATE SIZE
FINISH		REVISION	A1	00779
TOLERANCES UNLESS OTHERWISE SPECIFIED		CUSTOMER DRAWING	TABLE 4.1	SHEET 1 OF 2

THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
AD 00		SEE SHEET 1		

- △ HOUSING MATERIAL: THERMOPLASTIC, COLOR-BLACK.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED POSTS.
- △ SOLDER PIN POST RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94-1.09 [.037-.043]; RECOMMENDED PAD DIA IS 1.52 [.060].
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.
- △ PART NUMBER IS OBSOLETE.

△△						1-532436-9	
△						1-532436-8	
△△						1-532436-7	
△△						1-532436-6	
△△						1-532436-5	
△△						1-532436-4	
△△	200.66 [7.900]	79	204.47 [8.050]	214.63 [8.450]	222.25 [8.750]	320	1-532436-3
△	187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	300	1-532436-2
△	175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	280	1-532436-1
△	162.56 [6.400]	64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	260	1-532436-0
△	149.86 [5.900]	59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	240	532436-9
△	137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	220	532436-8
△	124.46 [4.900]	49	128.27 [5.050]	138.43 [5.450]	146.05 [5.750]	200	532436-7
△	111.76 [4.400]	44	115.57 [4.550]	125.73 [4.950]	133.35 [5.250]	180	532436-6
△	99.06 [3.900]	39	102.87 [4.050]	113.03 [4.450]	120.65 [4.750]	160	532436-5
△	86.36 [3.400]	34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	140	532436-4
△	78.74 [3.100]	31	82.55 [3.250]	92.71 [3.650]	100.33 [3.950]	128	532436-3
△	73.66 [2.900]	29	77.47 [3.050]	87.63 [3.450]	95.25 [3.750]	120	532436-2
△	60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	100	532436-1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY: KIEBER	DATE: 10/07/93	TE Connectivity
DRAWN BY: KIEBER		PROJECT FILE: 483 [190] LONG SOLDER PINS, 00076 [000030] GOLD PLATE	DATE: 10/07/93	REWORKED TO: ---
CHECKED BY: KIEBER		DATE: 10/07/93	DRAWING ID: A1007789	REWORKED TO: ---
APPROVED BY: KIEBER		DATE: 10/07/93	CUSTOMER DRAWING	DATE: 4.1