


REV. NO.	DATE	BY	APP'D.	REVISIONS
1				AB REDWN & REV PER DF-2034 CT 1-90 SG
2				AC REACTIVATE 1--7; DF-4300 CT 1-91

PAR. NO.	A	B	Δ
8-32692-1	300.00±.00 (7620.0±.0)	.38 (9.7)	
8-32692-2	193.00±.00 (4878.0±.0)	.38 (9.7)	OBSELETE
8-32692-3	50.00±.00 (1270.0±.0)	.38 (9.7)	OBSELETE
8-32692-4	11.00±.10 (279.4±.1)	.38 (9.7)	OBSELETE
8-32692-5	24.62±.24 (625.3±.3)	.75 (19.1)	OBSELETE
8-32692-6	13.00±.10 (330.3±.1)	.75 (19.1)	OBSELETE
8-32692-7	25.87±.25 (652.7±.3)	.75 (19.1)	OBSELETE
8-32692-8	25.75±.25 (650.1±.3)	.75 (19.1)	OBSELETE
8-32692-9	13.00±.10 (330.3±.1)	.38 (9.7)	OBSELETE
8-32692-0	11.00±.10 (279.4±.1)	.25 (6.4)	OBSELETE
1-832692-1	7.75±.10 (196.9±.1)	.38 (9.7)	OBSELETE
1-832692-2	8.00±.10 (203.2±.1)	.45 (9.7)	OBSELETE
1-832692-3	11.50±.10 (291.8±.1)	.38 (9.7)	OBSELETE
1-832692-4	13.00±.10 (330.3±.1)	.38 (9.7)	OBSELETE
1-832692-5	15.00±.10 (381.0±.1)	.38 (9.7)	OBSELETE
1-832692-6	17.00±.10 (431.8±.1)	.38 (9.7)	OBSELETE
1-832692-7	25.00±.25 (635.0±.4)	.38 (9.7)	OBSELETE
1-832692-8	26.00±.26 (660.4±.4)	.38 (9.7)	OBSELETE
1-832692-9	10.00±.10 (254.0±.1)	.38 (9.7)	OBSELETE
1-832692-0	240.00±2.40 (6096.0±6.0)	.38 (9.7)	OBSELETE
2-832692-1	7.75±.10 (196.9±.1)	.38 (9.7)	OBSELETE
2-832692-2	25.00±.25 (635.0±.4)	.38 (9.7)	OBSELETE
2-832692-3	13.00±.10 (330.3±.1)	.38 (9.7)	OBSELETE
2-832692-4	13.00±.10 (330.3±.1)	.38 (9.7)	OBSELETE
2-832692-5	28.00±.28 (711.2±.4)	.38 (9.7)	OBSELETE
2-832692-6	48.00±.48 (1219.2±.2)	.38 (9.7)	OBSELETE
2-832692-7	22.00±.10 (558.8±.1)	.38 (9.7)	OBSELETE
2-832692-8	21.00±.10 (533.4±.1)	.38 (9.7)	OBSELETE
2-832692-9	16.00±.10 (406.4±.1)	.38 (9.7)	OBSELETE
2-832692-0	17.25±.10 (438.3±.1)	.38 (9.7)	OBSELETE
3-832692-1	12.25±.10 (311.2±.1)	.38 (9.7)	OBSELETE
3-832692-2	3.00±.10 (76.2±.1)	.38 (9.7)	OBSELETE
3-832692-3	7.00±.10 (177.8±.1)	.38 (9.7)	OBSELETE
3-832692-4	48.00±.48 (1219.2±.2)	.38 (9.7)	OBSELETE
3-832692-5	10.25±.10 (261.3±.1)	.25 (6.4)	OBSELETE
3-832692-6	10.25±.10 (261.3±.1)	.25 (6.4)	OBSELETE
3-832692-7	10.75±.10 (273.3±.1)	.25 (6.4)	OBSELETE
3-832692-8	8.50±.10 (215.9±.1)	.38 (9.7)	OBSELETE
3-832692-9	42.00±.42 (1066.8±10.7)	.38 (9.7)	OBSELETE
3-832692-0	5.58±.10 (141.8±.1)	.38 (9.7)	OBSELETE
4-832692-1	5.00±.10 (127.0±.1)	.50 (12.7)	OBSELETE
4-832692-2	50.00±.50 (1270.0±12.7)	.38 (9.7)	OBSELETE
4-832692-3	800.00±8.00 (20320.0±80.0)	.38 (9.7)	OBSELETE
4-832692-4	3.00±.10 (76.2±.1)	.38 (9.7)	OBSELETE
4-832692-5	10.00±.10 (254.0±.1)	.38 (9.7)	OBSELETE
4-832692-6	14.00±.10 (355.6±.1)	.38 (9.7)	OBSELETE
4-832692-7	15.00±.10 (381.0±.1)	.38 (9.7)	OBSELETE
4-832692-8	120.00±1.20 (3048.0±3.0)	.38 (9.7)	OBSELETE
4-832692-9	10.25±.10 (261.3±.1)	.12 (3.0)	OBSELETE
5-832692-0	11.62±.10 (295.1±.1)	.75 (19.1)	OBSELETE

- 1. .300 MAX DIMENSION HELD OVER THE .910 MAX AREA ONLY.
 - 2. MARKED PER MIL-STD-130.
 - 3. OPERATING VOLTAGE: 25 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.
 - 4. SEE AMP DWG. 840443 & 850345 FOR ADDITIONAL LENGTHS.
 - 5. LEADS WILL MATE WITH AMP LGH-1 OR IL RECEPTACLES.
- Δ WHERE APPLICABLE "B" STRIP LENGTH IS SOLDER DIPPED.

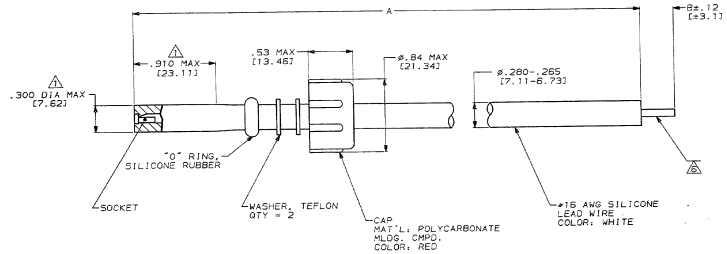

DO NOT SCALE PRINT. DIMENSIONS SPECIFIED IN INCHES (and MILLIMETERS) UNLESS OTHERWISE NOTED.	OR: S.T. BY: DATE: CHK: I-ESB: DATE: S. RLC: DEC: -: APPRO: T-ESB: DATE: M. B. G. DATE: -: POTENTIAL: SEE CALLOUTS	AMP INCORPORATED (Rev. 10-19-78)	NAME: LEAD ASS'Y, LGH 1 & 1L, SINGLE END
FINISH: -	APPLICATION SPEC: -	SIZE: D 00779	DRAWING NO: 832692
DETENT: -	SCALE: 2:1	SHEET: 1 OF 1	CUSTOMER DRAWING