

4



3

2

1




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P		LTR		DESCRIPTION		DATE	DWN	APVD
E2				REVISED PER ECO-11-005140		28MAR11	RK	HMR

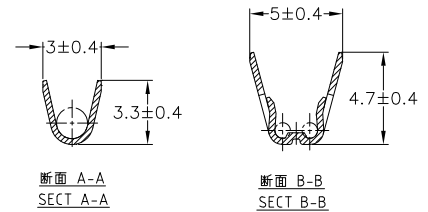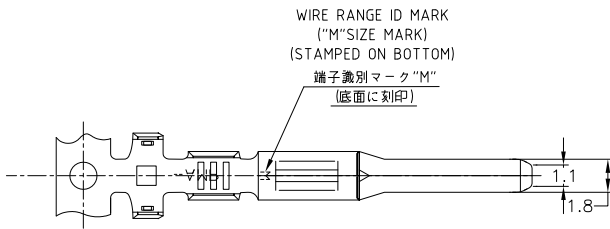


断面 A-A
SECT A-A

断面 B-B
SECT B-B

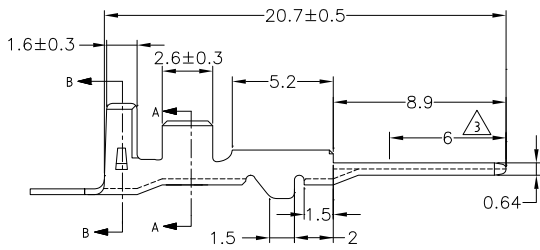

断面 A-A
SECT A-A
(175030のみ適用)
(ONLY 175030)



断面 B-B
SECT B-B
(175030のみ適用)
(ONLY 175030)

- 製品規格 ; 108-5231, 108-5264
 - 嵌合相手端子型番 ; 173631 他
 - 圧着規格 ; 114-5092
- SPEC ; 108-5231, 108-5264
 - RECEPTACLE CONTACT ; 173631 etc
 - APPLICATION SPECIFICATION ; 114-5092

SEE DRAWING 173645-5				173645-5
175030-3	部分金めっき SELECTIVE GOLD	リン青銅 板厚 0.32 PHOS BRO. 10.32		173645-3
175030-2	鍍めつき済み PRE-TINNED	リン青銅 板厚 0.32 PHOS BRO. 10.32		173645-2
175030-1	鍍めつき済み PRE-TINNED	黄銅 板厚 0.32 BRASS 10.32		173645-1
	仕上げ FINISH	材料 MATERIAL	型番 PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

WIRE RANGE 0.5~1.25mm ² (AWG#20-#16)	INSULATION DIA. 2~2.6mmφ	DWN M.SUGAWARA 16MAY06	TE Connectivity	
DIMENSIONS: 単位: 種 mm		CHK T.SHINOHARA 16MAY06	70 SERIES TAB CONTACT	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 16MAY06	NAME 名称	
0 PLC ± -		PRODUCT SPEC 製品規格 SEE NOTE		
1 PLC ± -		APPLICATION SPEC 取付適用規格 SEE NOTE		
2 PLC ± -		SIZE A3		
3 PLC ± -		CAGE CODE 00779		
4 PLC ± -		DRAWING NO 173645		
ANGLES ± -		RESTRICTED TO -		
MATERIAL 材料	FINISH 仕上	CUSTOMER DRAWING		
SEE TABLE		SCALE 尺度 5:1		SHEET 1 OF 1
SEE TABLE		REV E2		

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

10 _μ	± 0.2
30 _μ > 10	± 0.25
100 _μ > 30	± 0.3
ANGLE	± 3°