
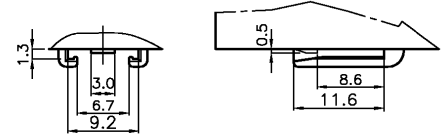
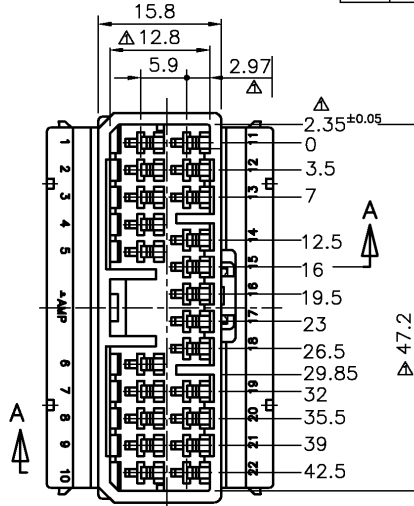




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.

LOC DS DIST

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
0		RELEASED(RD96-366)	23/NOV/96	YJ	JK
A		REVISED(FC00-0070-01)	23/JUN/01	MS	CS
B		REVISED(FC00-0028-03)	21/MAR/03	MS	CS
C		REVISED(ECR-05-006109)	22/AUG/05	IS	JK

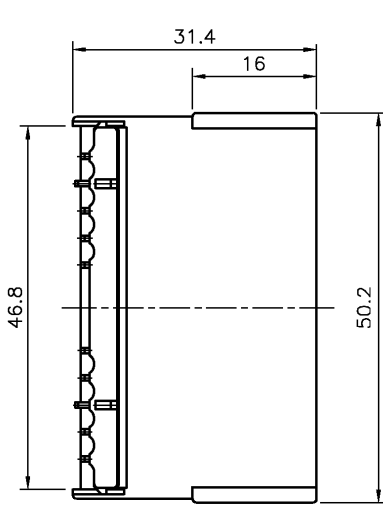

CLIP HOLE DETAIL

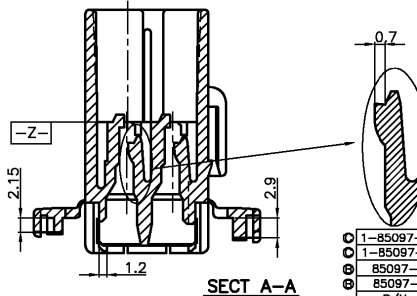

NOTE

- TO BE MEASURED BETWEEN $-Z-$ AND 2.
- TO BE MATED WITH PLUG HSG SMOOTHLY.
- APPLIED CONTACT P/N : 173633 & 173645.
- APPLIED PLUG HSG P/N : 85096
- CURRENT RATING: 10A MAX

P/N	MATERIAL	COLOR	PACKING
1-85097-7	P.B.T	YELLOW	FOR EXPORT-TRAY(50EA)/OUT BOX(400EA)
1-85097-1	P.B.T	WHITE	FOR EXPORT-TRAY(50EA)/OUT BOX(400EA)
85097-7	P.B.T	YELLOW	FOR LOCAL-POLY BAG(50EA)/INNER BOX(50EA)/OUT BOX(200EA)
85097-1	P.B.T	WHITE	FOR LOCAL-POLY BAG(50EA)/INNER BOX(50EA)/OUT BOX(200EA)

DWN IS SHIN		AMP KOREA.	
CHK BH JANG		kyungsan, korea	
APVD: JK SDNG		NAME	
PRODUCT SPEC		.070 MLC 22P CAP HSG.	
APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
WEIGHT		A3 00779C= 8 5 0 9 7	
MATERIAL		RESTRICTED TO	
FINISH		SCALE 2/1 SHEET 1 OF 1 REV C	

DIMENSIONS: mm
 3rd ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 <XX < 10 ± 0.2
 10 <XX < 30 ± 0.25
 30 <XX ± 0.3
 ANGLES ± 3°

MATERIAL SEE TABLE