
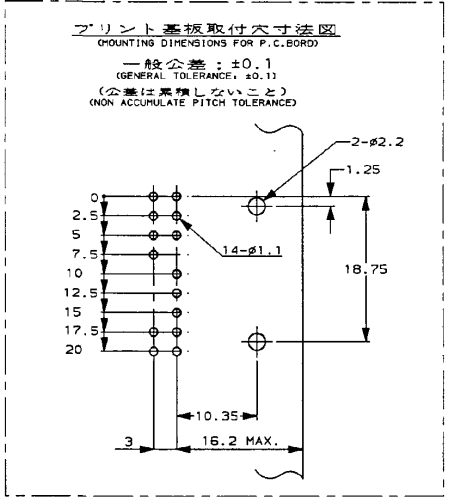


/med/autor/new/u.085-00...u.customer/s.c.-917604

NUMBER 917604
METRIC
PRINT DIST
REV. 2010-20
REV. 27-93

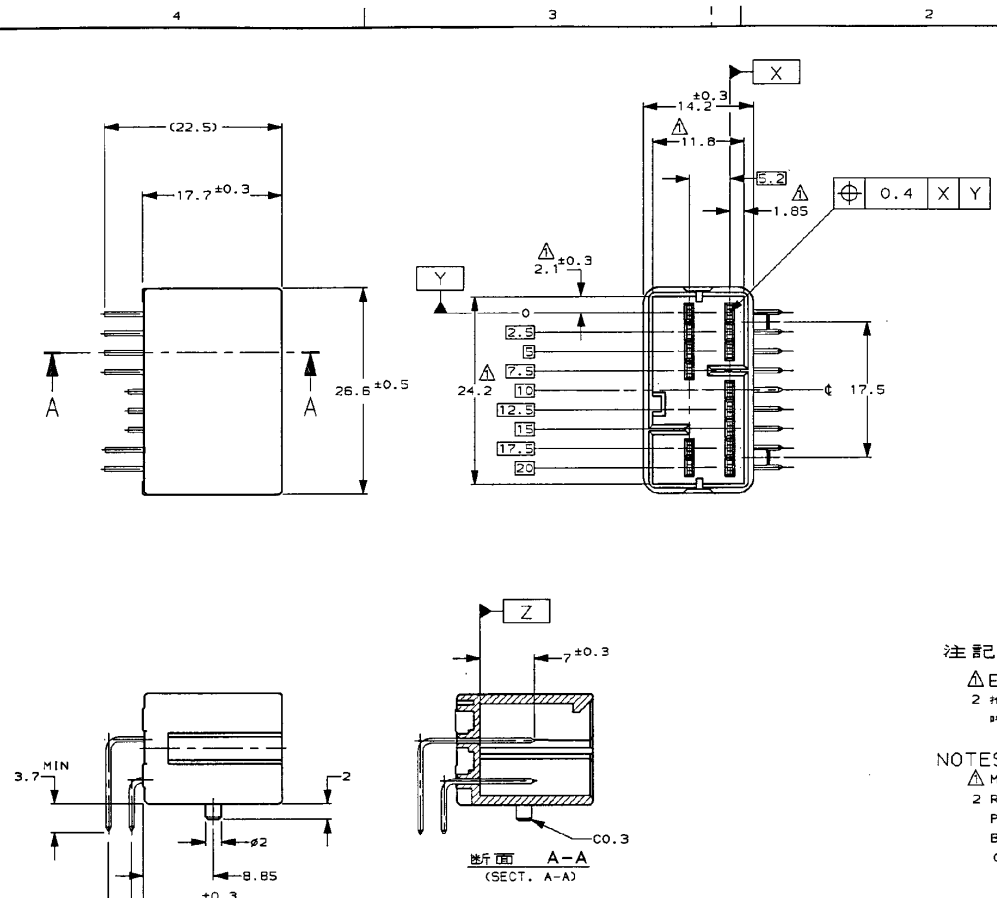

注記
△E-Z面から2mmの範囲で測定
2 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種
呼び径3, 長さ5mm以下 (締付けトルク: 4Kg-cm以下)

NOTES
△ MUST BE KEPT BETWEEN [E-Z] AND 2
2 RECOMMENDED MOUNTING SCREW; 3mm DIA, 5mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE; 4Kg-cm MAX.)

| | | | | | |
|--|----------------------|--|-----|--|-----------------------------|
| Copyright ©1994年 | | Copyright ©1994 AMP (Japan), LTD. ALL RIGHTS RESERVED. | | 色 (COLOR) 白 (NATURAL WHITE) | 製品型番 (PART NO.) 917604-1 |
| 名称 (NAME) 14Pin. CAP HOUSING ASS'Y (.040 MULTI-LOCK 1/0 CONNECTOR 14極 キャップハウジングアッセンブリ) | | 色 (COLOR) 白 (NATURAL WHITE) | | 製品型番 (PART NO.) 917604 | |
| 材質 (MATERIAL) ハウジング: PBT コンタクト: BRASS | | 仕上 (FINISH) PRE-TINNED 錫メッキ | | 一般公差 (GENERAL TOLERANCE) 寸法 ±0.2 10mm未満 ±0.25 30mm以上100mm未満 ±0.3 それ以上 ±0.3 | |
| 0 | 作成 | SS | NO | REV. | 0 |
| LTR | 変更 (REVISION RECORD) | DR | CHK | DATE | SHEET 1 OF 1 |

(CUSTOMER DRAWING) 参考 面