THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
FT	0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	Z	REVISED PER ECO-07-010234	5/2/07	SS	GS
	Z1	REVISED PER ECO-09-020935	09SEP09	KK	AEG

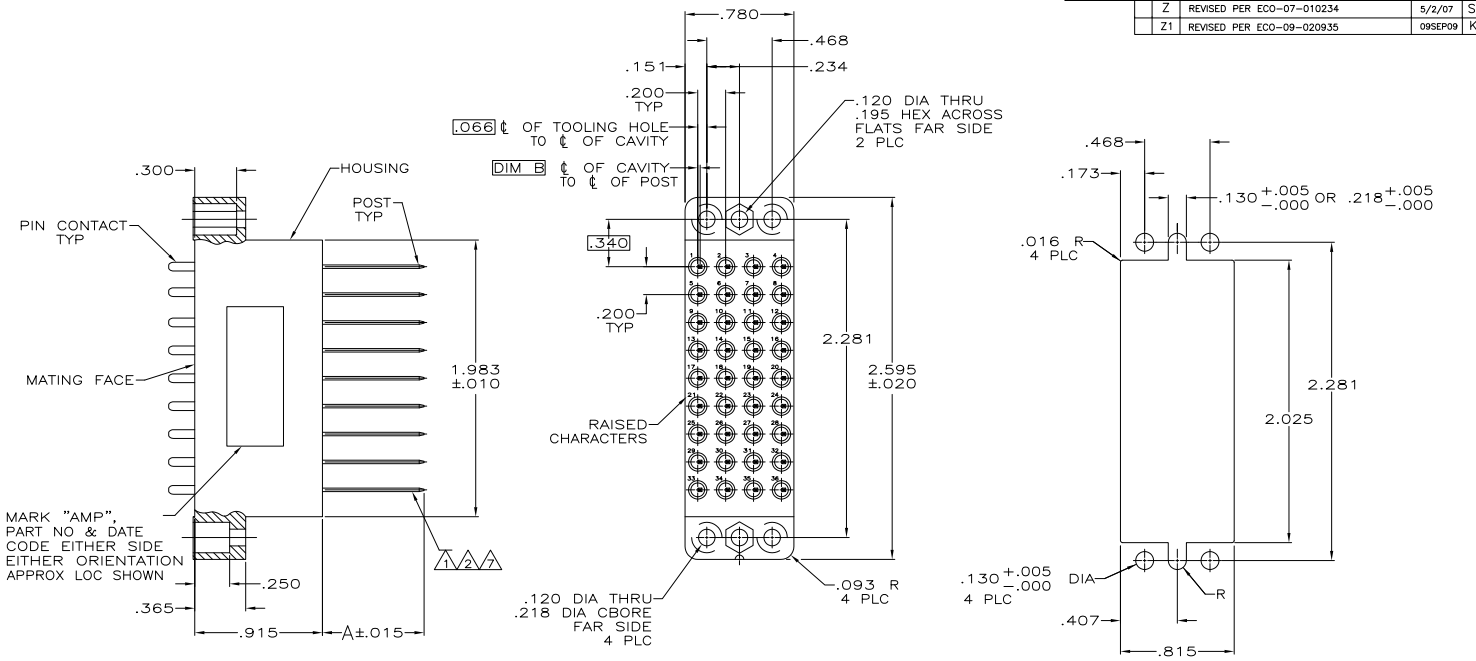

SUGGESTED PANEL CUTOUT

1. CONTACTS ARE AUTOMATICALLY WIREABLE.
2. POST LENGTH WILL ACCEPT 3 TERMINATIONS.
3. THE MAX WIRE TO BE USED WITH THIS CONNECTOR IS #24 AWG.
4. .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
5. GOLD PLATED PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
6. TIN-LEAD PLATED PER MIL-T-10727.
7. SELECTIVELY LOADED; POSITIONS 1 THRU 12, 17 THRU 20, AND 25 THRU 36, FOR 205629-2 ONLY.
8. .000100 MIN TIN OVER .000050 MIN NICKEL.
9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

NOTES	POST PLATING	DIM B	DIM A	CONTACT FINISH	PART NUMBER
—	8	.017	.659	5	1-205629-2
9 —	8	.017	.215	5	1-205629-1
OBSOLETE 7	8	.000	.810	5	1-205629-0
—	8	.000	.810	5	205629-9
OBSOLETE —	—	.005	.810	6	205629-8
OBSOLETE —	—	.017	.160	5	205629-7
9 OBSOLETE —	4	.017	.659	5	205629-5
INACTIVATED —	—	.000	.810	6	205629-4
—	4	.017	.215	5	205629-3
9 OBSOLETE 7	4	.000	.810	5	205629-2
—	4	.000	.810	5	205629-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: HOUSING: PHENOLIC, MIL-M-14, TYPE GPO, COLOR: BLACK
CONTACTS & POSTS: BRASS
FINISH: CONTACTS: SEE TABLE
POSTS: SEE TABLE

DWN B. MOYER 04/24/91
CHK R. STONE 5-8-91
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
PIN BLOCK ASSEMBLY, 36 POSITION, .200 GRID, M SERIES
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-205629	–

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV Z1

205629

AMP 1471-9 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor