

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	F	REVISED PER ECO-11-021434	31/OCT/11	ECC GM

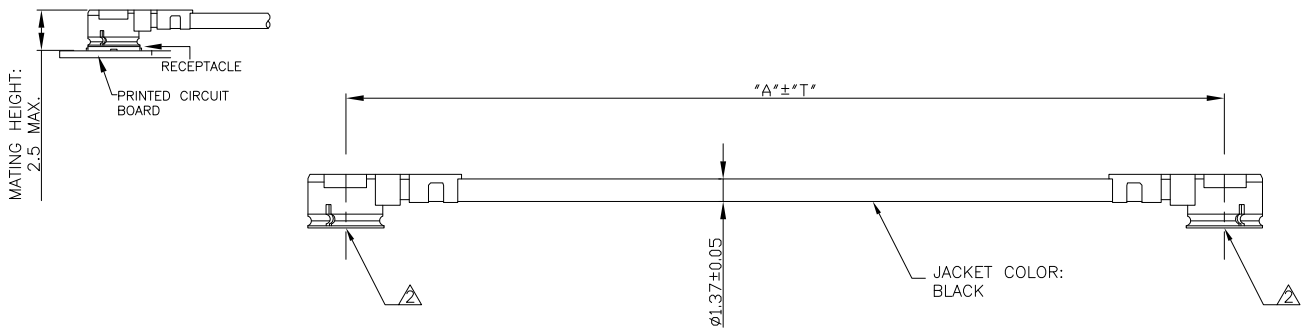

NOTES:

- 1 CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS & CONTINUITY
 HI-POT: 200 VDC FOR 100ms
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHz
 VSWR: 1.5:1 MAX

△ CONNECTOR: TYPE III U.FL
 SUPPLIER: 1-PEX,PN:20351-112R-37
 INNER CONTACT: Au-PLATED, OUTER CONTACT Au-PLATED OR CUSTOMER APPROVED EQUIVALENT.

- 3 PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702.

2	150	2015357-5
3	200	2015357-4
2	100	2015357-3
2	50	2015357-2
2 = 60 = 2015357-1		
TOLERANCE "T"	LENGTH "A"	PART NUMBER

OBSELETE →

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TianFei 13SEP07	TE Connectivity													
DIMENSIONS: mm [INCHES]		CHK Michael Han 13SEP07	NAME JEFF ORNER													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JEFF ORNER 13SEP07	PRODUCT SPEC RF C/A, UMCC TO UMCC, TYPE III, 1.37MM CABLE													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -	FINISH -	WEIGHT -	DRAWING NO C-2015357	RESTRICTED TO -												
CUSTOMER DRAWING			SCALE N.T.S.	SHEET 1 of 1												
			REV F													

1470-19 (3/11)

31OCT2011 10:48am us022590 C:\A-WORK\Cable_Assemblies\Mitsios\REVISED\2015357_1-c.dwg