

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		NEW RELEASE	20NOV07	ZZQ	LZ

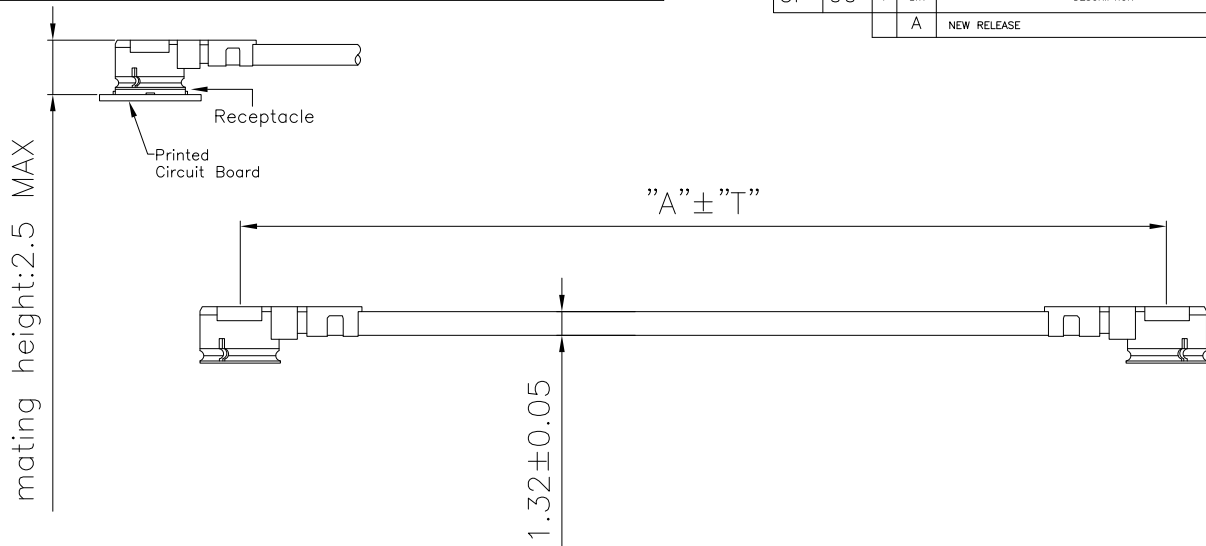

NOTES:

- CABLE ASSEMBLY TO BE 100% TESTED FOR OPEN, SHORT & CONTINUITY
 HI-POT: 200 VDC FOR 100ms
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHz
 VSWR: 1.5:1 MAX

PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

2	50	2015700-3
3	200	2015700-2
2	100	2015700-1
TOLERANCE "T" (mm)	LENGTH "A" (mm)	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	20NOV07		Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK	20NOV07		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD	20NOV07		
MATERIAL		NAME	JEFF ORNER		
FINISH		PRODUCT SPEC	RF C/A, UMCC TO UMCC, TYPE III, 1.32MM CABLE		RESTRICTED TO
		APPLICATION SPEC			
		WEIGHT	SIZE	CAGE CODE	DRAWING NO
			A3	00779	2015700
		CUSTOMER DRAWING	SCALE		SHEET
			N.T.S.		1 OF 1
					REV
					A