

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 (C) COPYRIGHT ALL RIGHTS RESERVED.

LOC		REVISIONS		
P	LTR	DESCRIPTION	DATE	DWN
C1		REVISED PER ECO-11-005294	05APR11	RK HMR

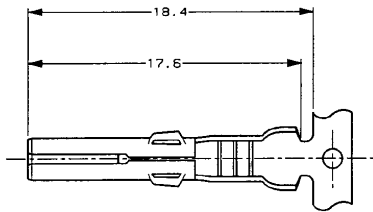


VIEW A




SECT B-B

注記  
 △製品規格 108-5037

NOTE  
 △PRODUCT SPEC. 108-5037

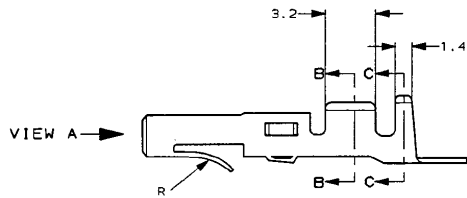

VIEW A



SECT C-C

170120-4	リン青銅	0.32t	錫めっき済	170121-4
170120-1	黄銅	0.32t	錫めっき済	170121-1
型番	材料		仕上	LP型番

DIMENSIONS 単位: ㎜		TOLERANCES UNLESS OTHERWISE SPECIFIED		CHK Y. TANAKA 8/FEB/74	APVD T. IMAIZUMI 8/FEB/74
SEE TABLE 表参照		SEE TABLE 表参照		DESIGNER Y. SATO 12/FEB/74	NAME Y. SATO
MATERIAL 材料		FINISH 仕上		PRODUCT SPEC 製品規格	
				APPLICATION SPEC 取付適用規格	
				WEIGHT	
				CUSTOMER DRAWING	

FIRE RANGE  
 防火電線許容電圧  
 0.50-2.27mm<sup>2</sup> / AWG#20-#14

INSULATION DIA  
 被覆外径  
 MAX 3.3mm  
 最大 3.3mm



MATE-N-LOK SOCKET  
 メイテンロック ソケット

SIZE A3	CAGE CODE 00779	DRAWING NO 170120
SCALE 実尺 4-1	SHEET 1 OF 1	REV C1

参考 面