

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	A1	REVISED PER ECO-11-005033	23MAR11	RK HMR

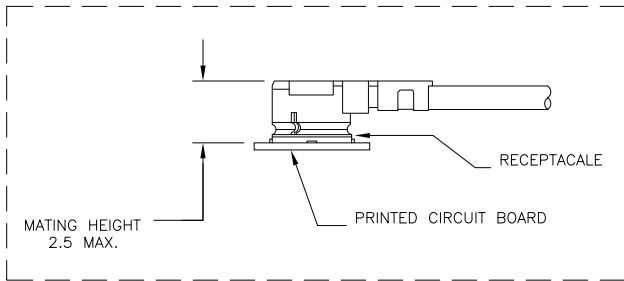

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.

2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR TYPE III.

3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100ms VSWR: 1.5:1 MAX.

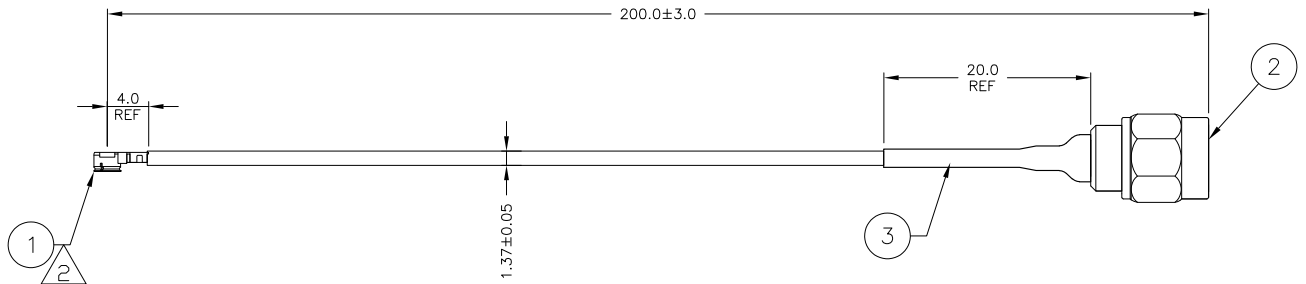

2032439-1	
PART NO.	

QTY	PC	DESCRIPTION	ITEM
3	PC	TUBING, HEAT SHRINK	3
2	PC	SMA, PLUG	2
1	PC	UMCC, PLUG WITH 1.37 CABLE	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	E.C. CLAYBAUGH	04/DEC/07
DIMENSIONS: mm [INCHES]		CHK	J. ORNER	04/DEC/07
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. ORNER	04/DEC/07
0 PLC	± -	NAME		
1 PLC	± -	CABLE ASSY, RF, UMCC PLUG TO SMA PLUG [1.37mm CABLE]		
2 PLC	± -	SIZE		
3 PLC	± -	CAGE CODE		
4 PLC	± -	DRAWING NO		
ANGLES	± -	RESTRICTED TO		
MATERIAL	FINISH	WEIGHT		
-	-	A3 00779 C-2032439		
CUSTOMER DRAWING		SCALE		N.T.S.

TE Connectivity	
CABLE ASSY, RF, UMCC PLUG TO SMA PLUG [1.37mm CABLE]	
SIZE	RESTRICTED TO
A3	-
CAGE CODE	DRAWING NO
00779	C-2032439
CUSTOMER DRAWING	SCALE
N.T.S.	SHEET
1 of 1	REV
A1	