

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00				
	A1	REVISED PER ECO-11-005033	23MAR11	RK	HMR

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR, TYPE III
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100mS VSWR: 1.5:1 MAX.

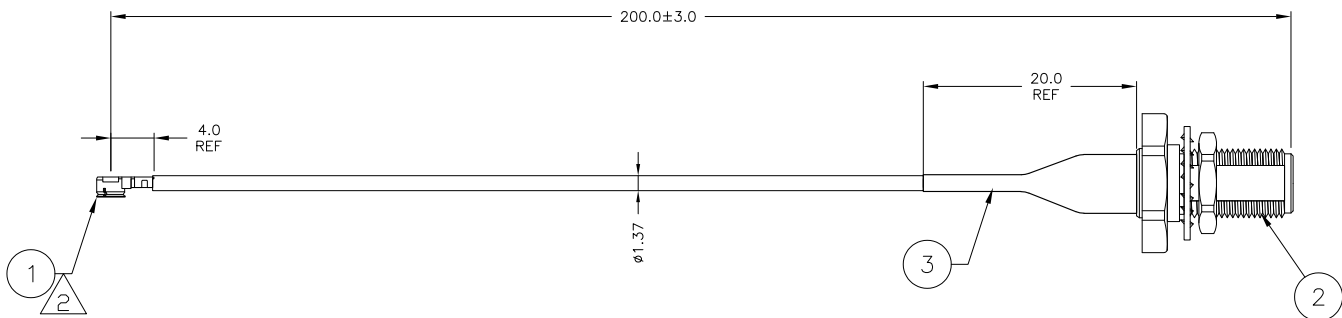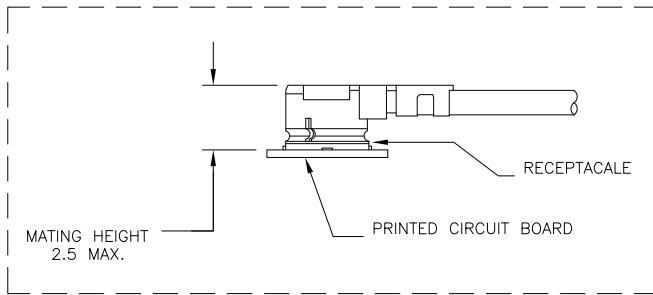

2032440-1
 TE CONNECTIVITY PART NO.

A/R	MR	TUBING, HEAT SHRINK	3
1	PC	SMA, BLKHD, JACK	2
1	PC	UMCC, PLUG [1.37mm CABLE]	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	E.C. CLAYBAUGH	04/DEC/07
DIMENSIONS:		CHK	J. ORNER	04/DEC/07
mm [INCHES]		APVD	J. ORNER	04/DEC/07
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
0 PLC	± -	CABLE ASSY, RF, UMCC PLUG TO SMA BLKHD JACK [1.37mm CABLE]		
1 PLC	± -	SIZE		
2 PLC	± -	CAGE CODE		
3 PLC	± -	DRAWING NO		
4 PLC	± -	RESTRICTED TO		
ANGLES	± -	A3 00779 C-2032440		
MATERIAL	FINISH	WEIGHT		
-	-	CUSTOMER DRAWING		

TE Connectivity			
SCALE N.T.S.			
SHEET 1 OF 1			
REV A1			