

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APPD		
C		REV PER 0514-0469-03	20NOV03	KW	KW		

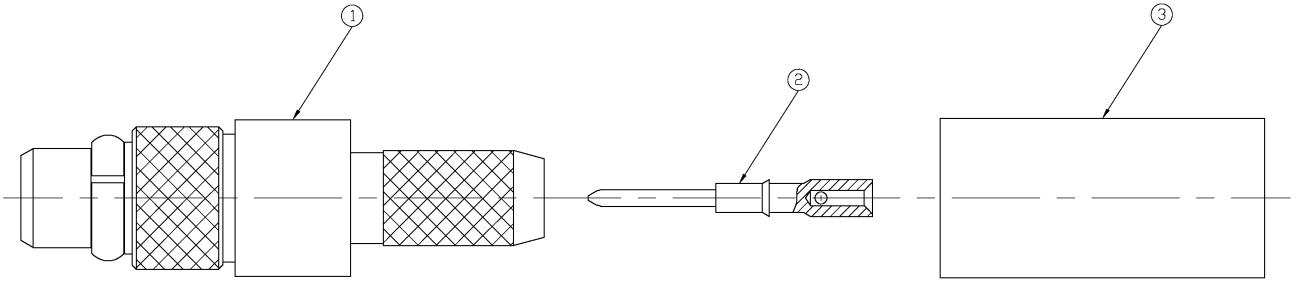

RECOMMENDED CABLE STRIP LENGTH (NTS)

- 1. ITEMS 1, 2, AND 3 PACKAGED UNASSEMBLED
- ⚠️ CRIMP REQUIREMENTS: CENTER CONTACT .70 [.028] SQUARE
- ⚠️ CRIMP REQUIREMENTS: FERRULE 3.25 [.128] HEX
- ⚠️ CRIMP REQUIREMENTS: FERRULE 3.86 [.152] HEX

RD-316 ⚠️⚠️	3-413889-2	1408215-4	1408317-1	1408312-2
RG-316 ⚠️⚠️	3-413889-1	1408215-4	1408317-1	1408312-1
CABLE CRIMP INFO	FERRULE ⚠️	CONTACT ⚠️	PLUG ASSY ⚠️	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: 0100701		Tyco Electronics Corporation	
DIMENSIONS: MM [INCHES]		CHK: 0200701		Middletown, PA 17057	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD: 0200701		NAME: MMCX STRAIGHT CABLE PLUG	
0 P.L.C. ± .01		P.L.C. 108-2084		RESTRICTED TO	
1 P.L.C. ± .01 [204]		PRODUCT SPEC		SEE CASE CODE DRAWING NO	
2 P.L.C. ± .005 [500]		APPLICATION SPEC		A2 00779 ©=1408312	
3 P.L.C. ± .005 [500]		MATERIAL		SCALE 15:1 SHEET 1 OF 1 REV C	
4 P.L.C. ± .005 [500]		FINISH		CUSTOMER DRAWING	
ANGLES ± .1°		WEIGHT .83G/.029oz			

AMP 1431-9 REV 31MAR2000

H:\products\mmcx\Shared_Area_Contents_1-23-03\dwg\MMCX_ST_PLUG-FLEX_CABLE\

1408312

B

A