
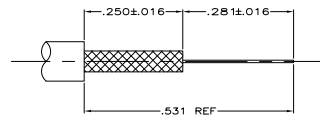


THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AJ	16				
AZ1		REVISED PER ECO-11-005030			

- △ BRASS PER QQ-B-626.
- △ BERYLLIUM COPPER PER ASTM-B-196
- △ NYLON PER ASTM-D-4066, BLACK
- △ POLYMETHYLPENTENE GENERAL PURPOSE, NATURAL
- △ .000030 MINIMUM GOLD PER MIL-G-45204.
- △ .000050 MINIMUM GOLD PER MIL-G-45204.
- △ .000100 MINIMUM GOLD PER MIL-G-45204.
- △ RG-174/U, RG-179A/U, RG-187/U, AND 21-598.
- △ SHIELDED CABLE #26=NAS-702 CLASS A & C, AND MIL-W-16878 TYPES E & EE, SHIELDED CABLE #24=NAS-702 CLASS A & C, AND MIL-W-16878 TYPES E & EE, SHIELDED CABLE #22=NAS-702 CLASS C, AND MIL-W-16878 TYPE E, AND MIL-C-7078A TYPE I NUMBER 1 DIELECTRIC .088 O.D.
- 1 Q. SEE IS 408-1770
- △ NYLON PER ASTM-D-4066, NATURAL
- △ DIELECTRIC MATERIAL: VALOX 325 WHITE

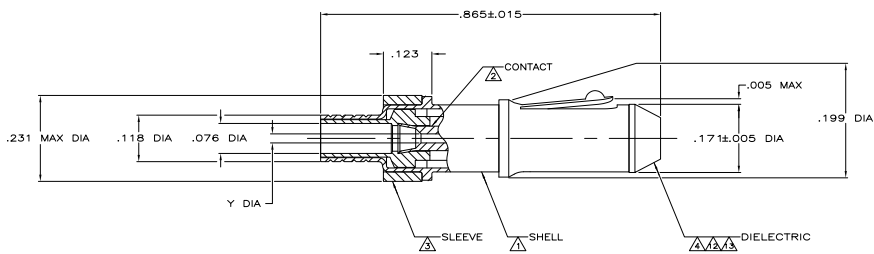

VIEW D  
 RECOMMENDED STRIP LENGTH

CONTACT PLATING	SHELL PLATING	WEIGHT	CABLE OR WIRE SIZE	CRIMP TOOL	Y	FERRULE QTY=1	SPRING RETENTION QTY=1	PIN ASSY QTY=1	PART NUMBER
△	△	.030 OUNCES	-	-	.032±.003	-	-	-	2-201143-5
△	△	.030 OUNCES	-	-	.032±.003	-	-	-	2-201143-4
△	△	.030 OUNCES	-	-	.032±.003	-	-	-	201143-7
△	△	.030 OUNCES	-	-	.032±.003	-	-	-	201143-5
△	△	.030 OUNCES	-	-	.042±.003	-	-	-	201143-3
△	△	.030 OUNCES	-	-	.023±.003	-	-	-	201143-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE ISSUED: 02 JUN 82  
 BY: SNEDD  
 DATE: 23 FEB 82

TE Connectivity

108-12021

DATE DATE DRAWING NO: 100779 Q=201143

CUSTOMER DRAWING