

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT © BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.




LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
B1		REVISED PER ECO-09-003235		10FEB09	HMR	CR	

MATERIAL:
 HOUSING: POLYAMIDE 66, UL94V-0, COLOR: BLACK
 TERMINAL: BRASS, TIN PLATED
 SCREW: STEEL, NICKEL PLATED

ELECTRICAL:
 CURRENT RATING: 15A, 300V
 INSULATION WITHSTANDS: 2000V, 1 MIN
 INSULATION RESISTANCE: 2000Mohm, 500VDC
 WIRE RANGE: 16-22 AWG

ENVIRONMENTAL:
 OPERATION TEMP.: -40° TO +105° C
 SCREW TORQUE: 12 LB-IN

1. RECOMMENDED STACKING NOT TO EXCEED 16 POSITIONS.

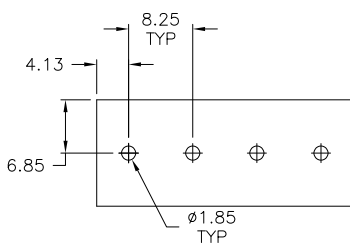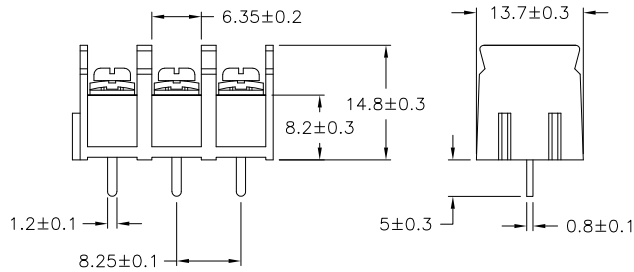

RECOMMENDED PCB LAYOUT

123.75	132.00	16	1-1977477-6
115.50	123.75	15	1-1977477-5
107.25	115.50	14	1-1977477-4
99.00	107.25	13	1-1977477-3
90.75	99.00	12	1-1977477-2
82.50	90.75	11	1-1977477-1
74.25	82.50	10	1-1977477-0
66.00	74.25	9	1977477-9
57.75	66.00	8	1977477-8
49.50	57.75	7	1977477-7
41.25	49.50	6	1977477-6
33.00	41.25	5	1977477-5
24.75	33.00	4	1977477-4
16.50	24.75	3	1977477-3
8.25	16.50	2	1977477-2
DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16SEP2008	Tyco Electronics Corporation	
DIMENSIONS: mm		CHK	S SCHLEGEL	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S MACE	NAME	
0 PLC	±	PRODUCT SPEC	DUAL BARRIER, TERMINAL BLOCK		
1 PLC	±0.3	APPLICATION SPEC	8.25mm PITCH		
2 PLC	±0.25	WEIGHT	SIZE	CAGE CODE	DRAWING NO
3 PLC	±	MATERIAL	A3	00779	C=1977477
4 PLC	±	FINISH	RESTRICTED TO		
ANGLES	±2°	CUSTOMER DRAWING			
			SCALE	NTS	SHEET 1 OF 1
			REV B1		