


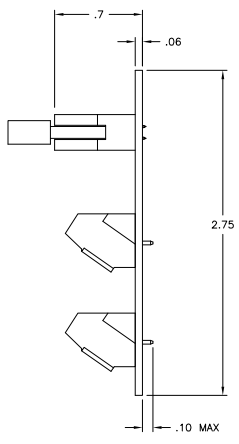


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	O	F	LN	DESCRIPTION	DATE	MIN	APD
		B		REVISED PER ECO-05-10413	9/30/05	SS	SRV

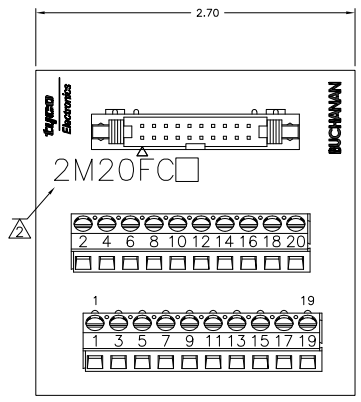

HEADER:
 MATERIALS:
 HEADER: COPPER ALLOY, GOLD PLATED, 94V-0 THERMOPLASTIC.
 CONNECTOR: COPPER ALLOY, GOLD OVER NICKEL, 94V-0 THERMOPLASTIC.

ELECTRICAL:
 RATING: 1 AMPERE MAX. (CONNECTOR).

MECHANICAL:
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.

TERMINAL BLOCK:
 MATERIALS:
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.
 TERMINALS: COPPER ALLOY, BRIGHT ACID-TIN OVER COPPER PLATED.
 SCREWS: 3M, BRASS, NICKEL PLATED

ELECTRICAL:
 RATING: 10A, 300V(UL).

MECHANICAL:
 WIRE RANGE: 14-22 AWG.

MOUNTING:
 MATERIALS:
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK (SOLD SEPARATELY).

- ⚠ ALL CONNECTOR/STRAIN RELIEF COMPONENTS TO BE SHIPPER LOOSE AND UNASSEMBLED.
- ⚠ CATALOG NUMBER MARKED HERE.
- ⚠ CONTAINS NO TIN-LEAD PLATING.

2M20FCL	1776626-1
2M20FC	1-1437684-2
CATALOG NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW M.S. FEHER 01APR2004	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK S. YODER 01APR2004	Tyco Electronics Corporation	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD S. YODER 01APR2004	2M20FC ASSEMBLY	
0 PLC	± .01	PRODUCT SPEC	SIZE	CAGE CODE
1 PLC	± .01	APPLICATION SPEC	A2	00779
2 PLC	± .01	WEIGHT	1-1437684-2	
3 PLC	± .01	FINISH	CUSTOMER DRAWING	
4 PLC	± .01	ANGLE	SCALE NTS	
MATERIAL		SHEET 1 of 1		REV B

1-1437684-2