

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	D	REVISED PER ECO-05-10413	9/29/05	SS	SRY	

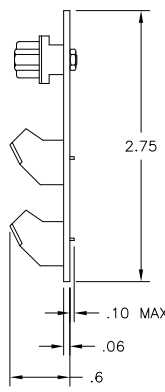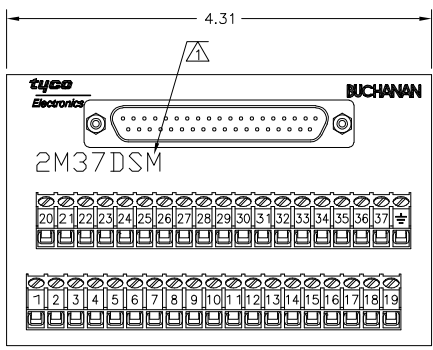

D-SUB CONNECTOR:
 MATERIAL:
 HOUSING: THERMOPLASTIC POLYESTER, 94V-0.
 CONTACTS: COPPER ALLOY, GOLD PLATED.

MECHANICAL:
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.

TERMINAL BLOCK:
 MATERIAL:
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.
 TERMINALS: COPPER ALLOY, TIN PLATED.
 SCREWS: 3M, BRASS, NICKEL PLATED.

ELECTRICAL CSA/UL:
 RATING: 10A, 300V.

MECHANICAL:
 WIRE RANGE: 14-22 AWG.
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK,
 (SOLD SEPARATELY).

- NOTES:**
- △ CATALOG NUMBER MARKED HERE.
 - △ CONTAINS NO TIN-LEAD PLATING.

△	2M37DSML	1546695-1
	2M37DSM	2-1437684-3
	CATALOG NO.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 08JUL02	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK H. WAKEEM 7/8/02	NAME 2M37DSM ASSEMBLY	
	0 PLC ± -	APVD H. WAKEEM 7/8/02	SIZE A3	CAGE CODE 00779
	1 PLC ± .1	PRODUCT SPEC	DRAWING NO 2-1437684-3	RESTRICTED TO
	2 PLC ± .01	APPLICATION SPEC	SCALE NTS	SHEET 1 of 1
	3 PLC ± -	WEIGHT	REV D	
	4 PLC ± -	CUSTOMER DRAWING		
MATERIAL	FINISH			