


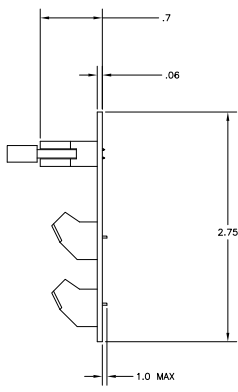


THIS DRAWING IS UNPUBLISHED. RECEIVED FOR INFORMATION
 © 2005 TTI - ALL RIGHTS RESERVED. TTI ELECTRONICS CORPORATION

| REV | DATE | DESCRIPTION | BY | APP |
|-----|---------|--------------------------|----|-----|
| 0 | | | | |
| A | 9/26/05 | REVISED PER ECO-05-10413 | SS | SRY |

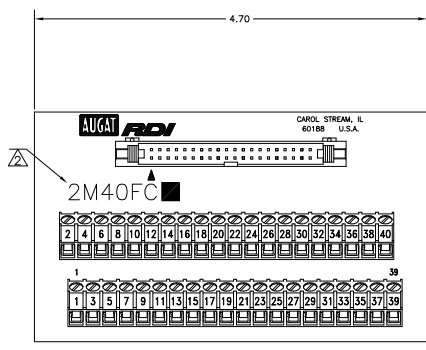

HEADER:
 MATERIALS:
 HEADER: COPPER ALLOY, GOLD PLATED, 94V-0 THERMOPLASTIC.
 CONNECTOR: COPPER ALLOY, GOLD PLATED, 94V-0 THERMOPLASTIC.

ELECTRICAL:
 RATING: 1 AMPERE MAX. (CONNECTOR).

MECHANICAL:
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.

TERMINAL BLOCK:
 MATERIALS:
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.
 TERMINALS: COPPER ALLOY, TIN PLATED.
 SCREWS: 3M, BRASS, NICKEL PLATED.

ELECTRICAL:
 RATING: 10A, 300V(UL).

MECHANICAL:
 WIRE RANGE: 14-22 AWG.

MOUNTING:
 MATERIALS:
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK (SOLD SEPARATELY).

⚠ ALL CONNECTOR/STRAIN RELIEF COMPONENTS TO BE SHIPPED LOOSE AND UNASSEMBLED.
 ⚠ CATALOG NUMBER MARKED HERE.
 ⚠ CONTAINS NO TIN-LEAD PLATING.

| | |
|-------------|-------------|
| 2M40FCL | 1776640-1 |
| 2M40FC | 2-1437684-6 |
| CATALOG NO. | PART NUMBER |

| | | | | | | | | | | | |
|--|--|------------------|--|------------------|--|------------------|--|------------------|--|------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | M. J. FISHER | | D. W. FISHER | | T. W. FISHER | | T. W. FISHER | | T. W. FISHER | |
| DESIGNED BY | | CHECKED BY | | APPROVED BY | | DATE | | DRAWING NO. | | REVISED TO | |
| 2M40FC ASSEMBLY | | 2M40FC ASSEMBLY | | 2M40FC ASSEMBLY | | 2M40FC ASSEMBLY | | 2M40FC ASSEMBLY | | 2M40FC ASSEMBLY | |
| CUSTOMER DRAWING | | CUSTOMER DRAWING | | CUSTOMER DRAWING | | CUSTOMER DRAWING | | CUSTOMER DRAWING | | CUSTOMER DRAWING | |