

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

COPYRIGHT - By -

Loc FT 0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
D1		REVISED PER ECO-11-005027	11MAR11	RK	HMR

SPECIFICATIONS:D-SUB CONNECTOR:MATERIALS:

HOUSING: THERMOPLASTIC POLYESTER, 94V-0.

CONTACTS: COPPER ALLOY, GOLD OVER NICKEL

MECHANICAL:

WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED


TERMINAL BLOCK:MATERIALS:

HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.

TERMINALS: COPPER ALLOY, BRIGHT ACID-TIN OVER

COPPER PLATED.


SCREWS: 3M, BRASS, NICKEL PLATED.

ELECTRICAL:RATING: 10A, 300V, MECHANICAL:



WIRE RANGE: 14-22 AWG.


MOUNTING:



MATERIALS: RIGID PVC, GRAY.

MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK,
(SOLD SEPARATELY). CONTAINS NO TIN-LEAD PLATING.

CAT. NO.

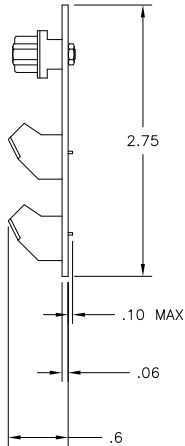

	2M09DSML	1546693-1
	2M09DSM	1437684-3
	CATALOG NO.	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		08JUL02		TE Connectivity		
INCHES				CHK	S. SCHLEGEL	7/8/02				
		0 PLC ± -		APVD	H. WAKEEM	7/8/02				NAME
		1 PLC ± .1		PRODUCT SPEC		2M09DSM ASSEMBLY				
		2 PLC ± .01		APPLICATION SPEC		-				
		3 PLC ± -		WEIGHT		-				
4 PLC ± -		FINISH		SIZE		CAGE CODE		DRAWING NO		
5 PLC ± -		-		A3		00779		C-1437684-3		
ANGLES ± -		-		RESTRICTED TO		-		-		
MATERIAL		-		CUSTOMER DRAWING		SCALE		NTS		
-		-		SHEET		1 of 1		REV		
-		-		D1		-		-		

1470-19 (3/11)