

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		REVISED PER ECO-05-10413	9/29/05	SS	SRY

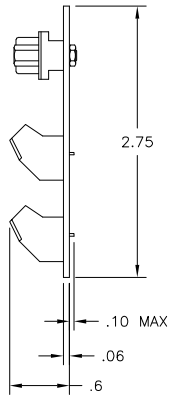

D-SUB CONNECTOR:
 MATERIAL:
 HOUSING: THERMOPLASTIC POLYESTER, 94V-0.
 CONTACTS: COPPER ALLOY, GOLD PLATED.

MECHANICAL:
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.

TERMINAL BLOCK:
 MATERIAL:
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.
 TERMINALS: COPPER ALLOY, TIN PLATED.

ELECTRICAL CSA/UL:
 RATING: 10A, 300V.

MECHANICAL:
 WIRE RANGE: 14-22 AWG.
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK,
 (SOLD SEPARATELY).

- NOTES:**
- ⚠ CATALOG NUMBER MARKED HERE.
 - ⚠ CONTAINS NO TIN-LEAD PLATING.

⚠	2M15DSML	1546694-1
	2M15DSM	1437684-7
	CATALOG NO.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL	08JUL02	tyco Electronics	Tyco Electronics Corporation Harrisburg, PA 17105-3608																									
DIMENSIONS: INCHES		CHK H WAKFEM	7/8/02		NAME 2M15DSM ASSEMBLY																									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H WAKFEM	7/8/02	PRODUCT SPEC -																										
<table border="1"> <tr><td>0</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>1</td><td>PLC</td><td>±</td><td>.1</td></tr> <tr><td>2</td><td>PLC</td><td>±</td><td>.01</td></tr> <tr><td>3</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>4</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td></td><td>±</td><td>-</td></tr> </table>		0	PLC	±	-	1	PLC	±	.1	2	PLC	±	.01	3	PLC	±	-	4	PLC	±	-	ANGLES		±	-	APPLICATION SPEC -		SIZE A.3		
0	PLC	±	-																											
1	PLC	±	.1																											
2	PLC	±	.01																											
3	PLC	±	-																											
4	PLC	±	-																											
ANGLES		±	-																											
MATERIAL -		WEIGHT -		CAGE CODE 00779		DRAWING NO 1437684-7																								
FINISH -		CUSTOMER DRAWING		RESTRICTED TO -		SCALE NTS																								
				SHEET 1 of 1		REV D																								