

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. © 2005 TYPHOON ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
0					
A		REVISED PER ECO-05-10413			SS SRY

**HEADER:**  
**MATERIALS:**  
 HEADER: COPPER ALLOY, GOLD PLATED,  
 94V-0 THERMOPLASTIC.  
 CONNECTOR: COPPER ALLOY, GOLD PLATED,  
 94V-0 THERMOPLASTIC.

**ELECTRICAL:**  
 RATING: 1 AMPERE MAX. (CONNECTOR).

**MECHANICAL:**  
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.





**TERMINAL BLOCK:**  
**MATERIALS:**  
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.  
 TERMINALS: COPPER ALLOY, TIN PLATED.  
 SCREWS: 3M, BRASS, NICKEL PLATED.

**ELECTRICAL:**  
 RATING: 10A, 300V(UL).

**MECHANICAL:**  
 WIRE RANGE: 14-22 AWG.

**MOUNTING:**  
**MATERIALS:**  
 MOUNTING: 2TK2 AND 2TK20 SERIES SNAPTRACK  
 (SOLD SEPARATELY).

⚠ ALL CONNECTOR/STRAIN RELIEF COMPONENTS TO BE SHIPPER LOOSE AND UNASSEMBLED.  
 ⚠ CATALOG NUMBER MARKED HERE.  
 ⚠ CONTAINS NO TIN-LEAD PLATING.

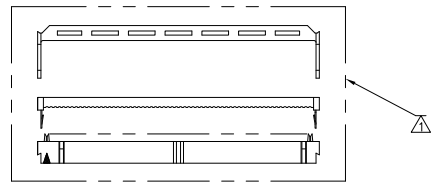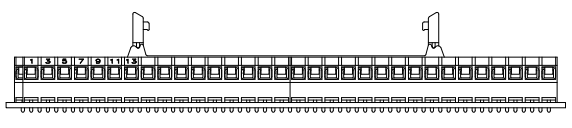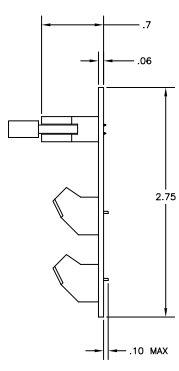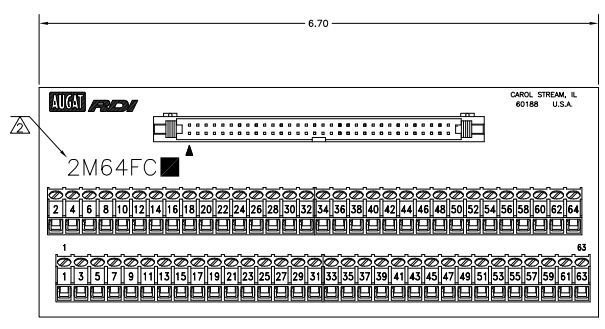

⚠	2M64FCL	1776647-1
	2M64FC	3-1437684-6
	CATALOG NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	BY	APP
DESIGNED BY	REVISIONS	DATE	BY	APP
ISSUED BY	DATE	BY	APP	
APPROVED BY	DATE	BY	APP	
CUSTOMER DRAWING		DATE	BY	APP