

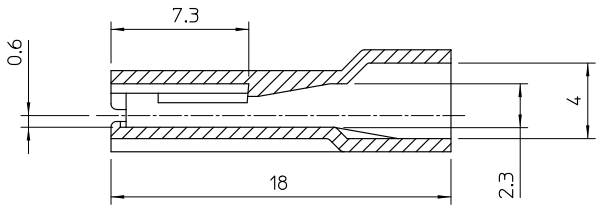


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-				



NOTES:  
 INSULATOR DESIGNED FOR USE WITH  
 4.8 QC RECEPTACLE TYCO P/N 1627099  
 (UTILUX PART No. H2590)

NYLON 66 GF HEAT STABILISED	INSULATOR, POST-FIT H2801B	1-1627121-2
NYLON 66 NATURAL	INSULATOR, POST-FIT H2801	1-1627121-1
MATERIAL DESC.	DESCRIPTION	PART No.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: W.RIEDE 25,4.06	Tyco Electronics Corporation AUSTRALIA			
ALL DIMENSIONS IN mm		CHK: H.THAI 01,05.06				
TOLERANCES UNLESS OTHERWISE SPECIFIED: DIMENSION (mm) TOLERANCE(+/-mm) LESS THAN 10 0.4 OVER 10 TO 30 0.5 OVER 30 TO 80 0.7 OVER 80 TO 250 1.0 ANGLES 42°		APVD: W.RIEDE 01,06.06	NAME: INSULATOR, POST-FIT			
		PRODUCT SPEC: -	SIZE: A3	CAGE CODE: -	DRAWING NO: 1627121	RESTRICTED TO: -
MATERIAL: -	FINISH: -	APPLICATION SPEC: -	CUSTOMER DRAWING			
		WEIGHT: -	SCALE: 5:1	SHEET: 1 OF 1	REV: 0	

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND IS NOT TO BE RELEASED TO ANYONE OTHER THAN TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA, USA.