
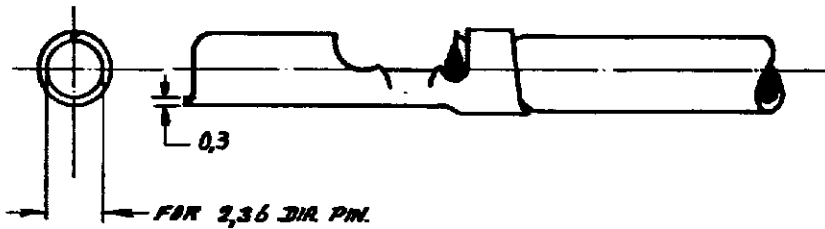


C-160208-E

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
G1	REVISED PER-ECO-09-022178	21SEP09	KK	AEG

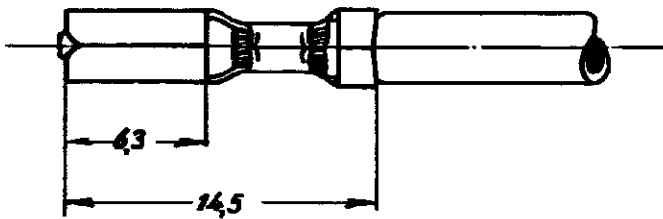

DIMENSIONS IN MM DO NOT SCALE PRINT

1-160208-2	STEEL	NICKEL
1-160208-1	PHOS. BRONZE	TIN
4-460200-0	STEEL	NICKEL W/ER. CO.
4-60200-7	BRASS	NONE
160208-5	BRASS	NICKEL
160208-4	PHOS. BRONZE	NONE
160208-3	BRASS	SILVER
160208-2	BRASS	TIN
160208-1	BRASS	NONE

1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

* REELED WITH PAPER.
160208-7 SUITABLE FOR AMP-D-MOTOR APPLICATION (12000 P.C.S. PER REEL)

CUSTOMER COPY FOR REFERENCE ONLY

©1966 BY AMP-HOLLAND N.V. ALL RIGHTS RESERVED AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.



WIRE RANGE 25-40 mm	INSUL. RANGE 23-33 P.M.M.	FIRST USED
SCALE 4:1	LOC H	SIZE A
NO C-160208-E		REV G1

ORDER NO.	MATERIAL	PLATING
DR. P. BONDY. 28/12-66		
DATE	DATE	DATE
CHK	DATE	APP. DATE

NAME **PIN RECEPTACLE**

AMP 1282