





C-170002

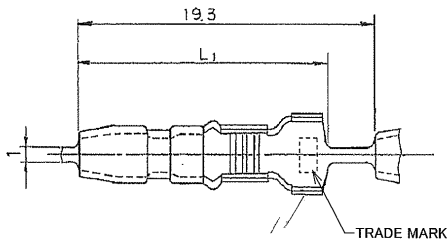

SECT. A-A



SECT. B-B

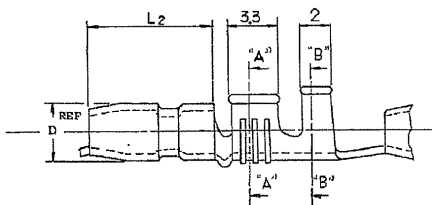

NOTE

- △ THESE ITEMS ARE FOR USE OTHER THAN IN JAPAN.
- △ GENERAL TOLERANCES; ±0.4
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

注記

- △ 海外向製品.
- △ 一般公差; ±0.4

170002-8	17.0	8.7	4.0	7000	108-5003	BRASS	PRE-TIN
△ 3-170002-4	17.0	8.7	4.0	15000	108-5003	PHOS-BZ	POST-TIN
△ 3-	-3	17.0	8.7	4.0	15000	-5003	
△ 3-	-2	15.8	7.3	3.5	15000	-5004	POST-TIN
△ 3-	-1	15.8	7.3	3.5	15000	-5004	PHOS-BZ
OBSOLETE	2	5	17.0	8.7	4.0	20000	-5003
△	1	7	15.8	7.3	3.5	25000	-5004
OBSOLETE	1	6	17.0	8.7	4.0	25000	-5003
OBSOLETE	1	5	17.0	8.7	4.0	25000	-5003
OBSOLETE	1	4	17.0	8.7	4.0	20000	-5003
△	1	2	15.8	7.3	3.5	20000	-5004
△	1	1	15.8	7.3	3.5	20000	-5004
	-7	170020-4	15.8	7.3	3.5	7000	-5004
	-5	3	17.0	8.7	4.0	5000	-5003
	-4	-2	17.0	8.7	4.0	7000	-5003
170002-2	170020-1	15.8	7.3	3.5	7000	108-5004	BRASS POST-TIN

PART NO.	LOOSE	PCS	NO	DIM	DIM	DIM	QTY/REEL	PROD SPEC NO.	MATERIAL	FINISH
TE Connectivity										
SERIES: SHUR RANGE			INSULATION DIA.			SP (NAME)				
25-27mm AWG #14			2.5-3.8mm			シエアプラグ				
SEE TABLE			SEE TABLE			SHUR PLUG				
REV. R2			REV. R2			REV. R2				
LTK			DR			CHK				

R2	REVISED PER ECO-11-005030	RK	CHK
LTK	REV. INVISION RECORD	DR	CHK

(CUSTOMER DRAWING) 参考 図 面