THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
1	-

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	FIRST ISSUE (WAS 01-51020)	27AUG2001	A.P.	R.M.
	A1	CHANGED SEALING COLOUR (ET00-0259-01)	30OCT2001	A.P.	R.M.
	A2	REVISED PER ET00-0161-02	30OCT2002	P.Z.	R.M.
	A3	RELEASED FOR PRODUCTION FOR -1 (ET00-0002-03)	03FEB2003	P.Z.	R.M.
	A4	UPDATED GRAPHIC DRAWING (ECR-06-007324)	14DEC2005	P.Z.	O.C.
	B	CHANGED DWG. REVISION ACCORDING TO PART ECR 06-023010	03OCT2006	M.G.	R.M.
	C	MODIFIED LOCKING LANCE PROFILE ECR-07-025394	19DEC2007	D.B.	A.G.
	C1	ECR-11-001021	17JAN2011	M.P.	M.G.

P/N 284703-1 AS SHOWN
(CODING A)

SECTION C-C

Ø1.8: DIAMETRO MINIMO DI UN FORO ATTRAVERSO IL QUALE IL CONNETTORE PUO' PASSARE
(MINIMUM HOLE DIAMETER THAT THE CONNECTOR CAN PASS THROUGH)

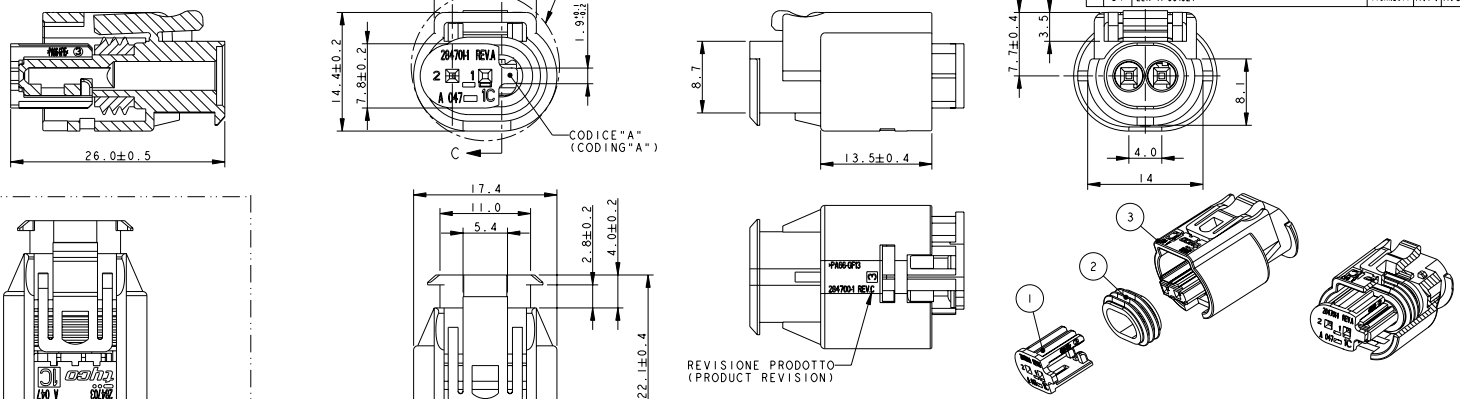

VISTA CON SECONDARY LOCK CHIUSO
(VIEW WITH SECONDARY LOCK IN CLOSED POSITION)

1) LE CAVITA' SONO ADATTE PER INSERIRE I CONTATTI MQS:
P/N 962885-... (0.35-0.5 mmq) E 965906-... (0.75 mmq) CON I RELATIVI GOMMINI PASSACAVO P/Ns 967067-1/-2.
VEDERE LA SPECIFICA DI APPLICAZIONE 114-18025 PER LA CORRETTA AGGRAFFATURA
(CAVITIES ARE SUITABLE FOR MQS SOCKET CONTACTS :
P/N 962885-... (0.35-0.5sqmm) AND 965906-... (0.75sqmm) AND RELEVANT SINGLE WIRE SEAL P/Ns 967067-1/-2
SEE APPLICATION SPEC. No. 114-18025 FOR CORRECT WIRE CRIMP PARAMETERS)

2) STATO DI FORNITURA, SECONDARY LOCK IN POSIZIONE PREASSEMBLATA
(SUPPLYING CONDITION, SECONDARY LOCK IN PRE-ASSEMBLED POSITION)

3) SECONDARY LOCK IN POSIZIONE CHIUSA (DOPO L'INSERIMENTO DEI CONTATTI IN CAVITA') PER LA CONNESSIONE CON LA CONTROPARTE
(SECONDARY LOCK IN CLOSED POSITION (AFTER CONTACTS INSERTION INTO CAVITIES) FOR MATING ONTO COUNTERPART)

4) ACCOPPIABILE CON DIMA IN ACCORDO A 114-18063-012 E CON CONNETTORE P/N 967079-...
(MATEABLE WITH INTERFACE ACCORDING TO 114-18063-012 AND WITH PIN CONNECTOR P/N 967079-...

CODICI DI POLARIZZAZIONE / (POLARIZATION CODINGS)

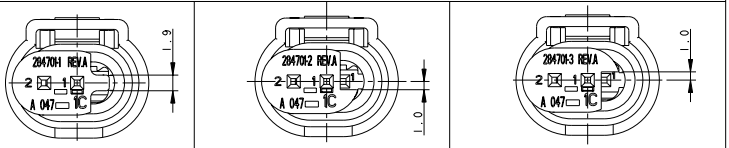

P/N 284703-1	P/N 284703-2	P/N 284703-3
CODICE A / (CODING A)	CODICE B / (CODING B)	CODICE C / (CODING C)
SECONDARY LOCK COLORE VERDE (SECONDARY LOCK GREEN COLOUR)	SECONDARY LOCK COLORE GRIGIO (SECONDARY LOCK GREY COLOUR)	SECONDARY LOCK COLORE BLU (SECONDARY LOCK BLUE COLOUR)
	PRELIMINARY PRE-PRODUCTION	PRELIMINARY PRE-PRODUCTION

Q.TA' (Q.TY)	COLORE (COLOUR)	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)	NO. (ITEM)
1	NERO/(BLACK)	PA66 GF	BLOCCHETTO/(HOUSING)	3
1	TRASPARENTE/(TRANSPARENT)	LSR	GUARNIZIONE/(SEALING)	2
1	VED. TABELLA CODICI POLARIZ. (SEE POLARIZATION CODINGS TABLE)	PA66 GF	SECONDARY LOCK	1

THIS DRAWING IS A CONTROLLED DOCUMENT OF TYCO ELECTRONICS CORPORATION IT IS UNLAWFUL TO COPY OR REPRODUCE THIS DRAWING WITHOUT AUTHORIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.3
1 PLC ±0.3
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-
MATERIAL SEE TABLE
FINISH -

DWN	A. PLAZIO 30MAR2001
CHK	R. MARTINI 30MAR2001
APVD	A.GENTA 30MAR2001
PRODUCT SPEC	108-20234
APPLICATION SPEC	411-20066
WEIGHT	-

Tyco Electronics AMP Italy S.r.l.
C.so F.lli Cervi, 15 - Collegno (TO)

NAME: MQS SOCKET HOUSING 2POS. ASS'Y

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-284703	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV C1

AMP 1471-9 REV 31MAR2000
Pro/ENGINEER DRAWING

Downloaded from Elcodis.com electronic components distributor