
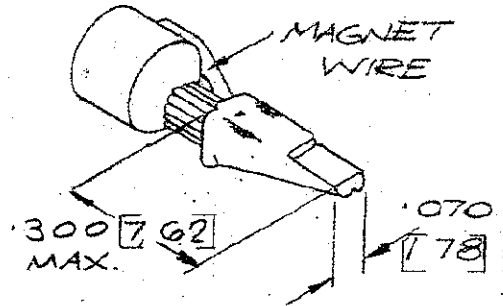




3rd ANGLE (AMERICAN) PROJECTION

DIMENSIONS IN INCHES. DO NOT SCALE PRINT
DIMENSIONS THUS [] IN MM.

NUMBER
C.153212

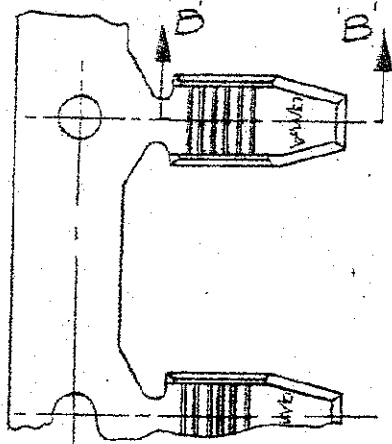

CRIMPED VIEW.

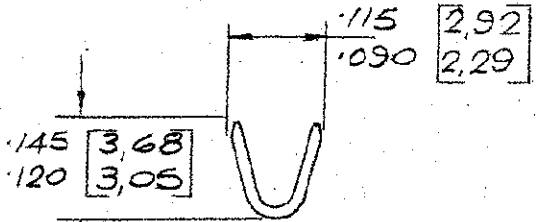

SECTION A-A.

NOTES:-

- 1/- WIRE RANGE-TINNED LEAD WIRE
255-1855 CMA; COPPER LEAD
WIRE 1250-1850 CMA.
- 2/- APPLICABLE WIRE SIZES 26-18
AWG. STRANDED WITH 40-26 AWG.
COPPER MAGNET.
- 3/- PRE-STRIPPING OF THE MAGNET
WIRE IS NOT REQUIRED.

153212-4	153212-2	ELECTRO-TIN	
153212-3	153212-1	NONE	
153212-2	BRASS	ELECTRO-TIN	
153212-1	BRASS	NONE	
PART N°	MATERIAL	FINISH	REELING DIRECTION OFF TOP OF REEL 'U'-ING DOWN

D2	ECR-10-021390	PKS	MP	18/10/09	CUSTOMER COPY REFERENCE ONLY
D1	ECO-09-022178	KK		22/09/09	
D	SEE EBOO-0271-01	AJB		18-7-01	 Tyco Electronics UK STANMORE MIDDX.
C	-2 ADDED	BR		10-7-74	
B	AMP ADDED	C.S.		22-7-74	CLASS
A	200-2,000 CMA WAS 20-2000.	PCA		6-6-72	WIRE - RANGE - INSULATION 200-2000 CMA
LTR	REVISION RECORD	DR	CHK	DATE	TOLERANCE EXCEPT AS NOTED ± .015 [0.38] ± 1° Ø
DE	J. MAGUIRE	13/1/74	APP		SCALE 5:1
CHK	E. R. CHAMBERS	13/1/74	APP		LOC E A
					NO C-153212
					REV D2
NAME MINIATURE AMPLIVAR SPLICE.					