

4

3



2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	OWN
B		REV PER QG3A-0677-03	03NOV03	JR MF

IDENTIFICATION NUMBER 32 FOR MAGNET WIRE RANGE

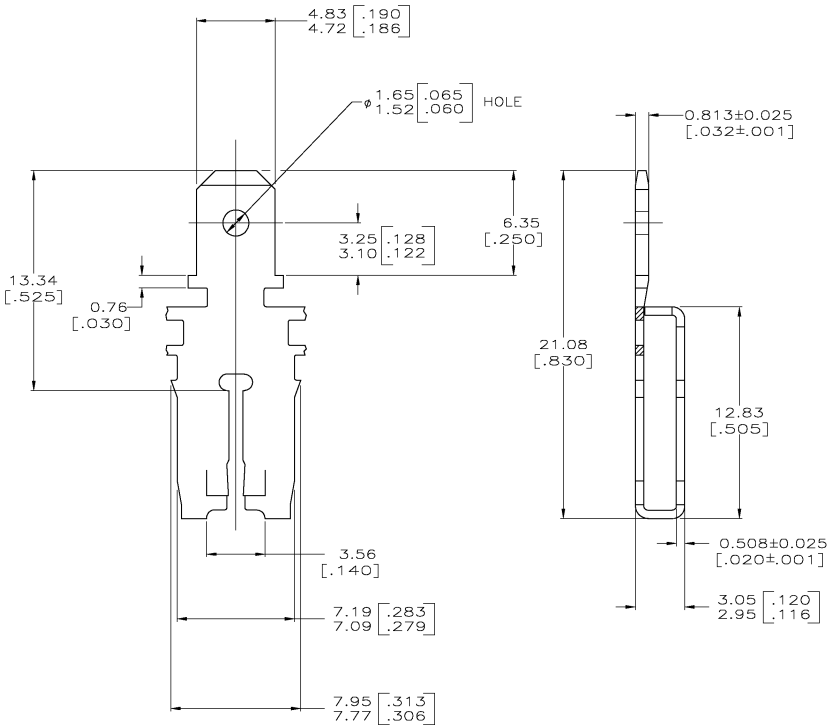

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38±0.08 [.330±.003] CENTERS
- 2 SLOT TERMINATES A SINGLE MAGNET WIRE ONLY. COPPER RANGE: 1.09-1.29mm [#17.5-#16] AWG.
- 3 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° TO POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4 VARNISH RESIST OVER 0.002032 [.000080] MIN TIN
- 5 PRELIMINARY - NOT FOR PRODUCTION

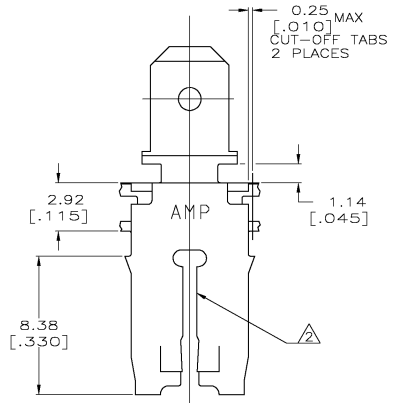

4	5
0.002032 [.000080] MIN TIN	1217075-2
FINISH	PART NUMBER
	1217075-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DW MICHAEL S. FEHLER 22MAR98		Tyco Electronics Corporation	
DIMENSIONS: TO RANGE UNLESS OTHERWISE SPECIFIED.		CHK JEFF R. RUTH 22MAR98		Horriaburg, PA 17105	
APPC DENNY SCHWENK 22MAR98		NAME		TAB, 4.75[.187] FASTON, MAG-MATE	
PRODUCT SPEC 108-2012		APPLICATION SPEC 114-2066		SEE CASE CODE DRAWING NO. 1217075	
MATERIAL H03 BRASS		FINISH SEE TABLE		RESTRICTED TO	
CUSTOMER DRAWING		SCALE 6:1		SHEET 1 OF 1 REV B	

AMP 1471-9 REV 31MAR2000

H:\dml\ecmod\

1217075

A