

4

3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
F	LWR	DESCRIPTION	DATE	BY	APPD
0		DRAWN PER 061A-0273-98	25AUG98	SU	NN

△ SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE, COPPER 0.18-0.23mm [#33-#31] AWG.
 2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

IDENTIFICATION NUMBER 4 FOR MAGNET WIRE RANGE

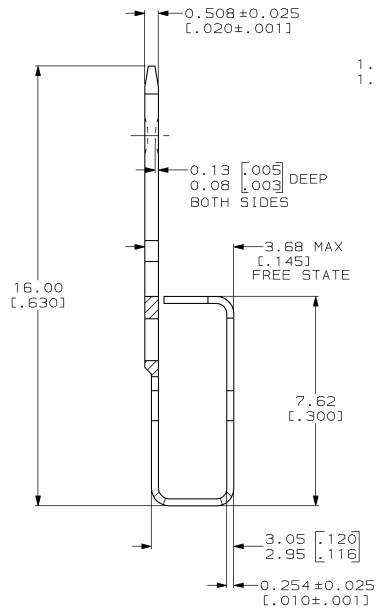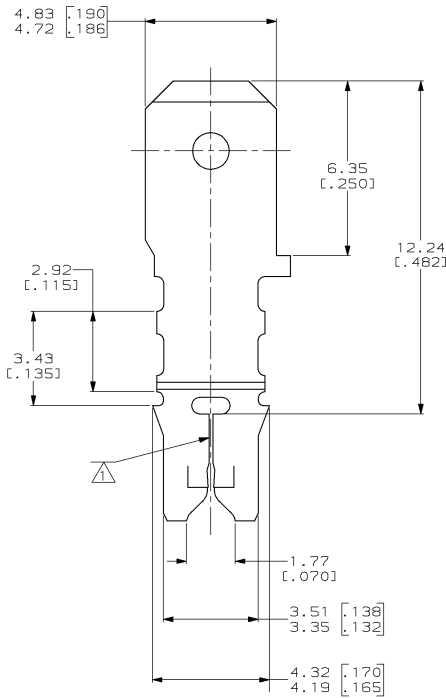

1.40 [.055] DIA DIMPLE

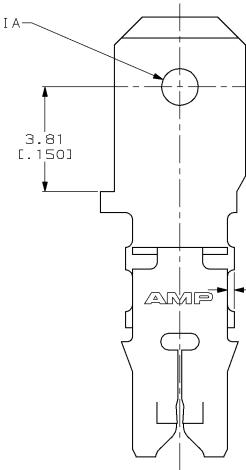

62663-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW: SCOTT URBICH 05AUG98	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCHES)		CHK: MICHAEL S. NEFF 18AUG98	AMP	
TOLERANCES UNLESS OTHERWISE SPECIFIED		APPRO: NELSON E. NEFF 25AUG98	TAB, 4.75 [.187] FASTON™	
Ø PLG	±.01	PRODUCT SPEC	LOOSE PIECE, MAG-MATE™	
Ø PLG	±.02	108-2012	SIZE	CAGE CODE (DRAWING NO)
Ø PLG	±0.25(.010)	APPLICATION SPEC	A2	00779
H. PLG	±.01	114-2046	SCALE	10:1
ANGLES	±.01	REWORK	SHEET	1 OF 1
MATERIAL: #4M HARD PRE-MILLED BRASS	FINISH: 0.002032(.000080) MIN TIN	CUSTOMER DRAWING	REV	0

62663

A