
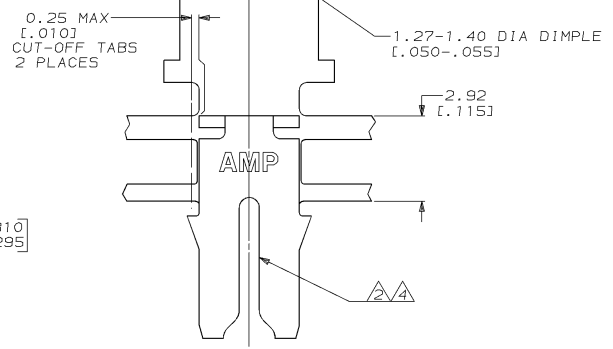
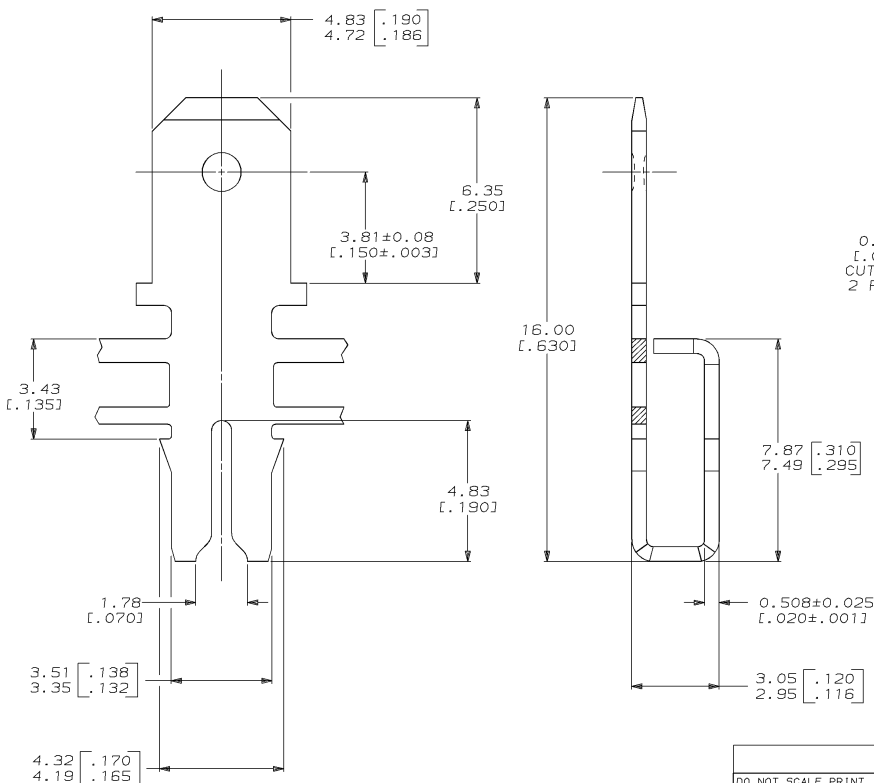


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

| REVISIONS | | | | | | | | | |
|-----------|------|---|---|------|-----|--------------------------------------|---------|------|-------|
| LOC | DIST | P | F | ZONE | LTR | DESCRIPTION | DATE | APPD | HF/NN |
| AF | 50 | | | | D | REVISED AND REDRAWN PER 0710-0086-96 | 18MAR96 | | |

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38±0.08 [.330±.003] CENTERS.
- 2 SLOT TERMINATES A SINGLE 0.81-1.02mm [#20-#18] AWG BARE SOLID COPPER WIRE.
- 3 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4 SLOT ALSO TERMINATES A SINGLE 0.81mm [#20] AWG OR A 0.81 [.032] DIA COPPER CLAD STEEL WIRE PER ASTM B452-67 CLASS 40 A.



| | | | | |
|---|----------------------------------|-------------------------------------|--|-----------------------|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON + 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± - | | DR 18/MAR/96 MICHAEL S. FEHER | 62904-1 PART NO | |
| MATERIAL 4M BRASS | APPD 22/MAR/96 RICK OSKOWIS | CHK 22/MAR/96 RICHARD GRZYBOWSKI | AMP AMP Incorporated Harrisburg, PA 17105-3608 | |
| FINISH 0.002032 [.000080] MIN TIN PER MIL-T-10727 | APPD 22/MAR/96 NELSON E. NEFF | NAME | TERMINAL, TAB, 4.75 [.187] FASTON™ MAG-MATE™ | |
| APPLICATION SPEC 114-2046 | PRODUCT SPEC 108-2012 | SIZE C | CAGE CODE 00779 | DRAWING NO C=62904 |
| WEIGHT - | SCALE 10:1 | SHEET 1 OF 1 | | |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING