


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50		B	REVISED PER 0710-0264-94	15/AUG/94	RB

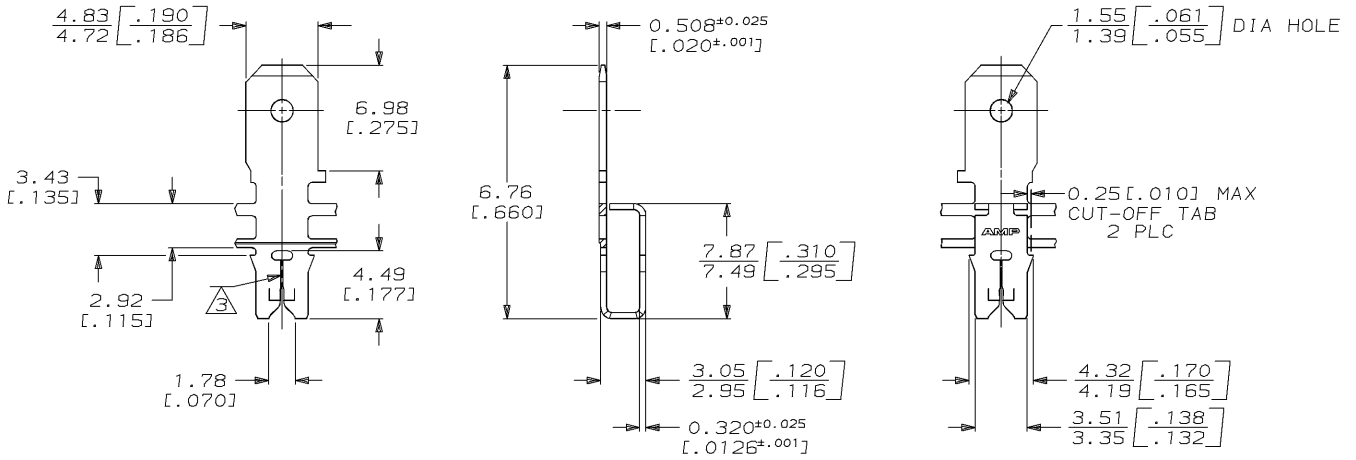

IDENTIFICATION NUMBER FOR MAGNET WIRE RANGE

- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED

△ SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE, COPPER 0.18-0.23mm [#33-#31 AWG]

METRIC

63584-1

PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.25(.010) ANGLES ± -	DR 7/8/90 D.E. SCHRUM CHK 7/11/90 M.S. FEHER APPD 7/13/90 N.E. NEFF APPD 7/17/90 T.L. SHUTTER
MATERIAL #4M HARD PRE-MILLED BRASS	PRODUCT SPEC 108-2012
FINISH 0.002032 [.000080] MIN TIN PER MIL-T-10727	APPLICATION SPEC 114-2046
WEIGHT -	

AMP AMP INCORPORATED
Harrisburg, Pa. 17105

NAME
TAB, .187 FASTON™
MAG-MATE™

SIZE B	CAGE CODE 00779	DRAWING NO 63584
SCALE 4:1	SHEET 1 OF 1	

AMP 1470-15 REV 6-89
15-AUG-94 15:16:20 amp25952 /files/dept2127/dwg2127/u.mag-mate/u.300

CUSTOMER DRAWING