


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 1997

© COPYRIGHT 1997 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				T	REV PER 0G3A-0037-01	16JAN01	JR/TH

AMP WIRE RANGE	UL Listed	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

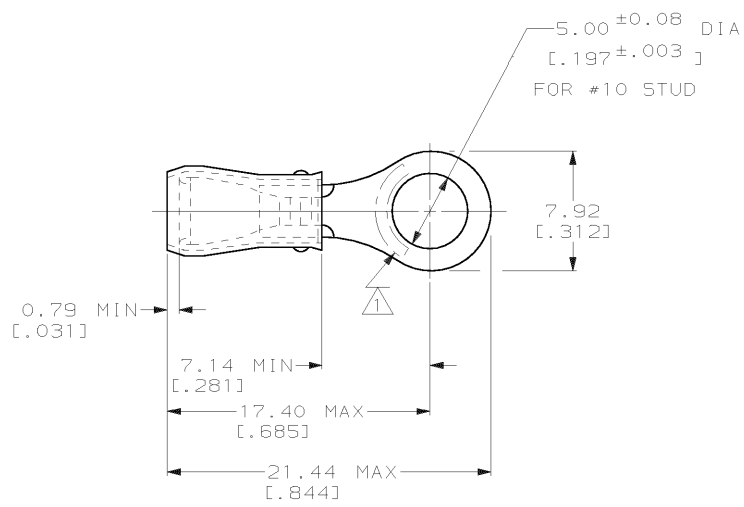

- ① STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN ACCORDANCE WITH MILITARY SPEC MIL-T-7928 COMMERCIAL WIRE RANGE IS 22-16
- 2 WIRE INSULATION DIA: .105 - .140
- 3 TONGUE MATERIAL THK: 0.79 ± 0.05 [0.031 ± 0.002]
- ④ AMP TESTED AND CONFORMS TO UL 486A BUT NOT SUBMITTED TO UL FOR APPROVAL
- ⑤ PRELIMINARY - NOT FOR PRODUCTION

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE:	105°C MAX	5000	ON TAPE	⑤ 2-31891-2
		VOLTAGE RATING:	300 V MAX	1000	LOOSE PIECE	31891
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	WIRE CROSS SECTIONAL AREA RANGE:	0.26-1.65mm ² (509-3,260) CIR MILS SOLID OR STRANDED	QUANTITY	PACKAGE TYPE	PART NO
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	MATERIAL	COPPER PER ASTM B-152 SLEEVE, RED VINYL	AMP Incorporated Harrisburg, PA 17105-3608		
FOR ORDER ENTRY	1-800-526-5142	FINISH	TIN PLATE PER ASTM B 545	NAME TERMINAL, RING TONGUE, PIDG™, WIRE SIZE, 22-16 AWG		
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DR	02/11/93 DK SCHUM	SIZE	CAGE CODE	DRAWING NO
		CHK	4/28/93 RE HERSEY	B	00779	C=31891
		APPD	4/28/93 ML ELLIS	SCALE	4:1	SHEET
		PRODUCT SPEC	④	1 OF 1		

AMP 1470-15 REV 3-92
27 JAN 1997 14:49:39 AMP10398 <UUI28A>DEPT1132>U.DWG1132>U.RBY>U.PIDG>U.CUST

CUSTOMER DRAWING