

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	02	F2	REVISED PER ECO-11-005835	22MAR11	HMR DR

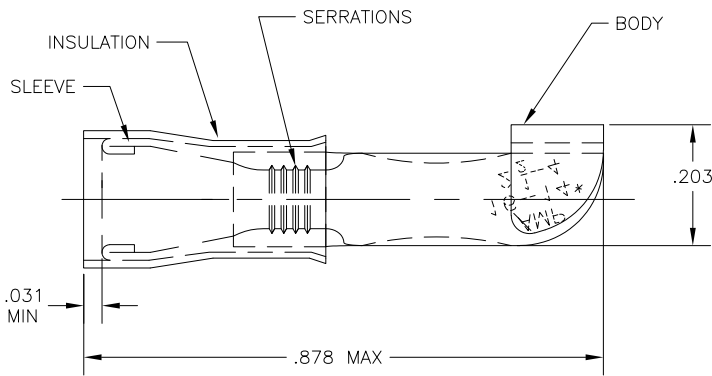

AMP WIRE RANGE	FILE E66717
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1 WIRE INSUL DIA .105-.150
- 2 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - CU PER ASTM B152
INSULATION - NYLON
- 3 FINISH: BODY & SLEEVE: TIN PER ASTM B-545
INSULATION - COLOR: BLUE

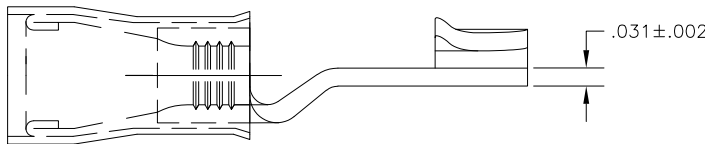

100	LOOSE PIECE, BOX, SPL	8-320566-5
50	LOOSE PIECE, BOX	8-320566-2
2000	ON TAPE	2-320566-1
500	LOOSE PIECE	320566
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: jr_ruth 11JUN09 CHK: TOM MICHIELUTTI 11JUN09 APVD: TOM MICHIELUTTI 11JUN09	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS PRODUCT INFORMATION CENTER 1-800-522-6752	FOR APPLICATION TOOLING ASSISTANCE CENTER TOOLING INFORMATION 1-800-722-1111	VOLTAGE RATING: 300 V MAX	DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± 5°	NAME: TOM MICHIELUTTI PRODUCT SPEC: UL 486A APPLICATION SPEC: - WEIGHT: -	TERMINAL, P.I.D.G., KNIFE DISCONNECT, WIRE SIZE: 16-14
FOR ORDER ENTRY 1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	CIRCULAR MIL AREA: 1.04-2.62mm² [2,050-5,180] SOLID OR STRANDED	MATERIAL: 2	FINISH: 3	SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-320566 RESTRICTED TO: -	CUSTOMER DRAWING SCALE: 6:1 SHEET: 1 OF 1 REV: F2