THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009
© COPYRIGHT 2009 - ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	BA1	REVISED PER ECO-11-005150	29MAR2011	RK	HMR

SERIES 3650-1J, 3650-2A AS SHOWN

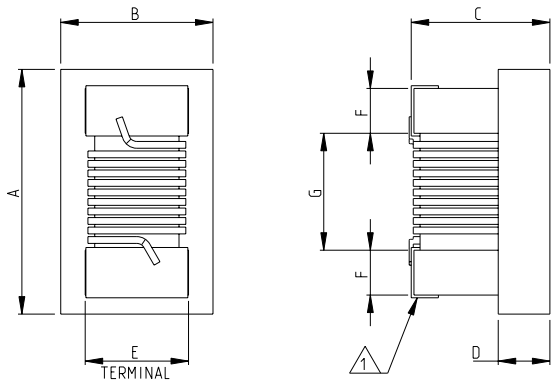

1. TERMINAL WRAPAROUND APPROX 0.007'' (0.18mm) BOTH ENDS
2. AVAILABLE IN 2 DIFFERENT SERIES
3. FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR

RoHS Compliant

RECOMMENDED LAND PATTERN FOR 3650-2A, 3650-1J SERIES



3650-1J SERIES



3650-2A SERIES



SERIES	A Max.	B Max.	C Max.	D ref	E	F	G	H	K	J
3650-1J	1.80	1.12	1.02	0.38	0.76	0.33	0.86	1.02	0.64	0.64
3650-2A	2.29	1.73	1.52	0.51	1.27	0.51	1.02	1.78	1.02	0.76

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.2
1 PLC ± 0.1
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± 5°

MATERIAL -
FINISH -

DWN SUBHASH.M 03-AUG-09
CHK ALLAN.P 03-AUG-09
APVD STEPHEN.P 03-AUG-09
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1624113	-

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV BA1

1470-19 (3/11)

Pro/ENGINEER DRAWING

Downloaded from Elcodis.com electronic components distributor