

4


3



2


1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
AF	50	E3	REV PER ECO	11-009028	02MAY11	JR	PD	

- 1 CONTINUOUS STRIP ON REELS.
- 2 ACCEPTS [#20-#16] AWG WIRE.
- 3 INSULATION RANGE TO BE 2.79-4.32 [.110-.170] DIA.
- 4 MATING TAB THICKNESS TO BE 0.51 ± 0.025 [.020 ± .001]
- 5 FEED TO BE 16.38 ± 0.13 [.645 ± .005]
- 6  PREPRODUCTION - FASR REQUIRED

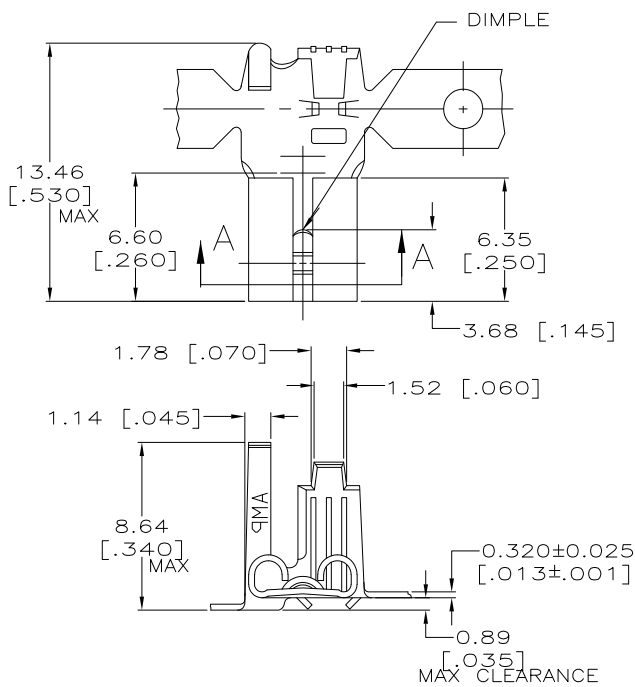

0.002032 [.000080] MIN TIN	H04 PHOS BRONZE		42618-3
0.002032 [.000080] MIN TIN	H04 BRASS		42618-2
-	H04 BRASS		42618-1
FINISH		MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		1/25/96		TE Connectivity			
DIMENSIONS: MM [INCHES]		CHK	JR RUTH						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	P FORTNEY	1/25/96					
0 PLC ± -		NAME		RECEPTACLE, FASTON, FLAG, MOLDABLE, 4.75 [.187] SERIES					
1 PLC ± -		PRODUCT SPEC		-					
2 PLC ± 0.38 [.015]		APPLICATION SPEC		-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ± -		WEIGHT		-		A3	00779	C=42618	-
4 PLC ± -		MATERIAL		SEE TABLE		CUSTOMER DRAWING		SCALE	SHEET
ANGLES ± -		FINISH		SEE TABLE		5:1		1	of 1
MATERIAL		FINISH		SEE TABLE		REV		E3	