

4


3



2


1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86				
	C2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

- 1 MATING TAB THICKNESS .032
- 2  ASTERISK * FOR PHOS BRONZE ITEMS ONLY.
- 3 WIRE INSULATION DIA TO BE .140 MAX
- 4 MAX RECOMMENDED OPERATING TEMP IS 105°C OR 221°F
- 5 VOLTAGE RATING IS 300V MAX
- 6 CIRCULAR MIL AREA 0.3-1.5mm² [592-2960]

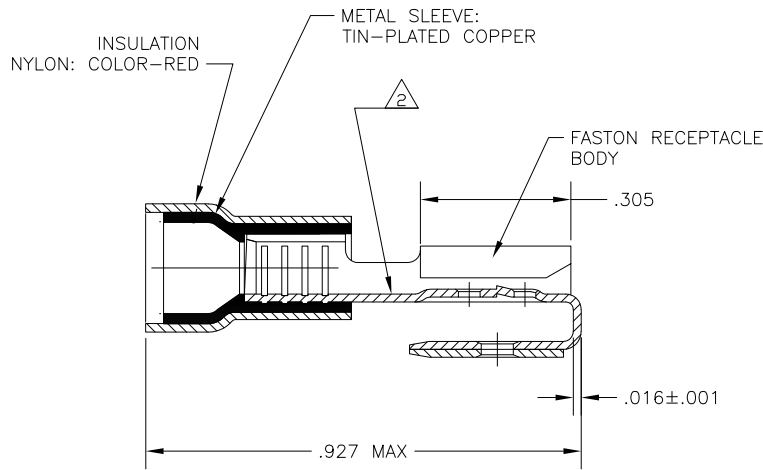

TIN PLATING	PHOS BRONZE 	160834-5
TIN PLATING	BRASS	160834-2
FINISH - TERMINAL	FASTON RECEPTACLE MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr_ruth 22FEB06	 TE Connectivity		
DIMENSIONS: INCHES		CHK T MICHELUTTI 22FEB06			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI 22FEB06	NAME		
0 PLC ± -		PRODUCT SPEC	250 SERIES P.I.D.G. FASTON REC, ASS'Y, PIGGYBACK, LOOSE PIECE WIRE SIZE: 22-16 AWG		
1 PLC ± -		APPLICATION SPEC	RESTRICTED TO		
2 PLC ± .02		MATERIAL	SIZE	CAGE CODE	DRAWING NO
3 PLC ± .008		FINISH	A3	00779	C-160834
4 PLC ± -		SEE TABLE	WEIGHT	CUSTOMER DRAWING	
ANGLES ± 0°30'	SEE TABLE	SCALE 5:1		SHEET 1 OF 1	
		REV C2			