

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N2	REVISED PER ECO-11-004917	11MAR11	RK	HMR






1. WIRE INSULATION DIA .100 MAX

2. FITS TAB THK .020±.001

3 SUPERSEDED BY 61060-1

4 SUPERSEDED BY 8-61060-1

5 MATERIAL & FINISH:
BODY - BRASS - PRE TIN PLATE
SLEEVE - NYLON, COLOR-SEE TABLE

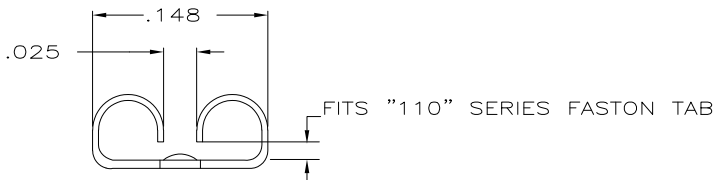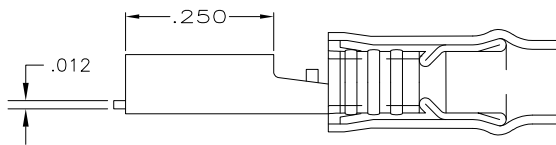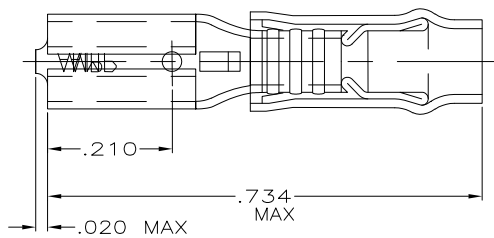

4	TRANSPARENT	50	LOOSE PIECE,BAG	8-61060-5
4	TRANSPARENT	5	LOOSE PIECE,BLS	8-61060-4
	TRANSPARENT	100	LOOSE PIECE,BOX	8-61060-1
3	BLACK	-	LOOSE PIECE	61060-3
	TRANSPARENT	5000	ON TAPE	61060-2
	TRANSPARENT	1000	LOOSE PIECE	61060-1
	INSULATION COLOR	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 13NOV95	TE Connectivity					
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 300V MAX	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 13NOV95	RECEPTACLE, 110 SERIES, FASTON, PIDG, WIRE SIZE: 22-18					
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± .015 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD B BARE 13NOV95	NAME	RESTRICTED TO				
TOOLING INFORMATION	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL	FINISH	PRODUCT SPEC	SIZE A3	CAGE CODE 00779	DRAWING NO C-61060	SCALE 1:1	SHEET 1 of 1	REV N2
FOR ORDER ENTRY	1-800-526-5142		5	5	APPLICATION SPEC	WEIGHT	CUSTOMER DRAWING				