

4




3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
F	7	REV	DESCRIPTION	DATE	BY
		B1	REVISED PER ECO-11-005150	21MAR11	RK HMR

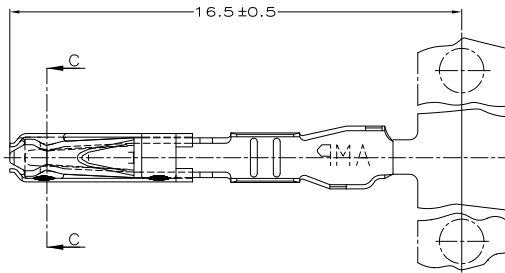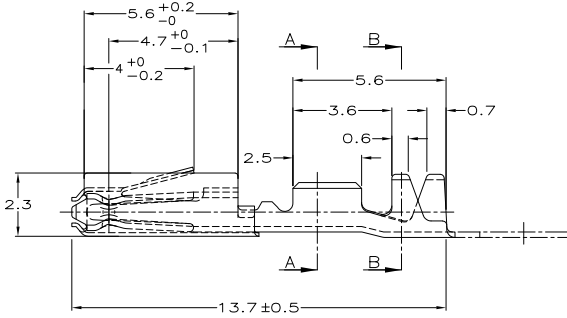

SECTION CC




SECTION AA



SECTION BB

144969-2 AS SHOWN

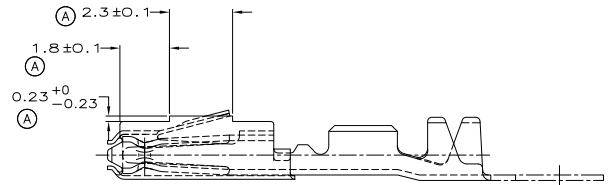

FOR PN 144969-1 AND -3
SAME DIMENSIONS AND DESIGN
AS 144969-2 EXCEPTED AS SHOWN.

PART NUMBER	4 CONTACT POINTS	AR. CAGE INOX SPRING	CRIMP AREA
144969-3	Au 0.4 to 0.8µm	Sn 0.8 to 3.3 µm	Sn 0.8 to 3.3 µm
144969-2	Au 0.4 to 0.8µm	Au 0.4 to 0.8µm	Sn 0.8 to 3.3 µm
144969-1	Sn 0.8 to 2µm pretinned	Sn 0.8 to 2µm pretinned	Sn 0.8 to 2µm pretinned

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW: D. ELISEI	18-NOV-93		TE Connectivity
DIMENSIONS: mm		CHK: J. LALANGE	24-SEP-98		CLIP MQS A SERTIR (0.2-0.6 SQ mm) MQS RECEPTACLE WITH BARRIER-CRIMP VERSION
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: J. REVIL	24-SEP-98	NAME: 108-18030	
FRACTIONAL DECIMALS		PRODUCT SPEC: 114-15077	APPLICATION SPEC: 0.2g	SIZE: A2	CAGE CODE: 00779
DECIMALS		WEIGHT: 0.2g	HEIGHT: 0.2g	DRAWING NO: C=144969	RESTRICTED TO: -
ANGLES		CUSTOMER DRAWING		SCALE: 10:1	SHEET: 1 of 1
MATERIAL: VOIR TABLEAU		FINISH: VOIR TABLEAU		REV: B1	