

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	A3	REVISED PER ECO-11-005027	11MAR11	RK HMR

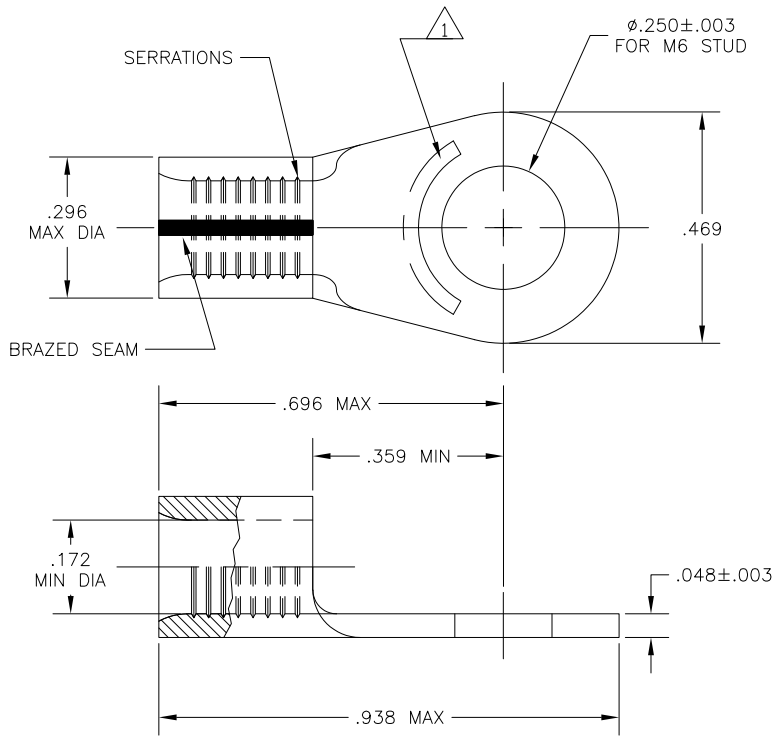

- 1 STAMP AMP 8, APPROX AS SHOWN
- 2 MAX RECOMMENDED OPERATING TEMP. IS 170°C MAX
- 3 VOLTAGE RATING IS NOT APPLICABLE
- 4 WIRE CROSS SECTIONAL AREA RANGE: 13,100-20,800 CMA / 6.64-10.5mm²
- 5 COPPER PER ASTM B-152, ANNEALED
- 6 .000100 MIN TIN PLATE PER ASTM B-545

△6	130550
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	jr_ruth	13FEB06	TE Connectivity	
DIMENSIONS: INCHES		CHK	T MICHELUTTI	13FEB06		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	T MICHELUTTI	13FEB06	NAME	
0 PLC	± .008	PRODUCT SPEC		TERMINAL, RING TONGUE, SOLISTRAND, WIRE SIZE: #8		
1 PLC	± .008	APPLICATION SPEC		RESTRICTED TO		
2 PLC	± .008	SIZE	A3	CAGE CODE	00779	DRAWING NO
3 PLC	± .008	WEIGHT	-	DRAWING NO		130550
4 PLC	± .008	CUSTOMER DRAWING		SCALE	5:1	SHEET 1 of 1
ANGLES	± 5°	MATERIAL		REV		A3
FINISH		SEE TABLE				